

# HIGH ENDURANCE series DSF STRAIN GAUGES

Operating temperature range



These strain gauges are not self-temperature-compensated. It may be necessary to measure a thermal output using a dummy specimen prior to the measurement.




Applicable adhesives

CN	-60 ~ +120°C
C-1	-60 ~ +200°C
EB-2	-60 ~ +200°C

## HIGH STRESS FATIGUE TEST

### Gauge pattern

These gauges are designed for fatigue test at high stress level. The gauges satisfy the fatigue life over 10 million times at a strain level of  $\pm 3000 \times 10^{-6}$ . It is available for use in cyclic loading test of composite materials.

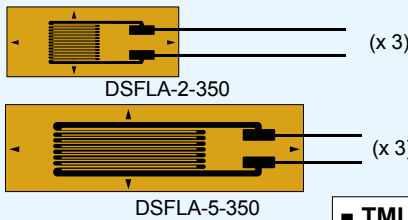


Example of type number designation  
**DSFLA-2 -350 -3LJB-F**

- DSFLA-2: Basic strain gauge type and gauge length
- 350: Gauge resistance
- 3LJB-F: Length in meter and type of leadwire, CE compliant

Each package contains 10 gauges.

DSFLA-2-350	2	2	8	3.3	350
DSFLA-5-350	5	2	11	3.2	350

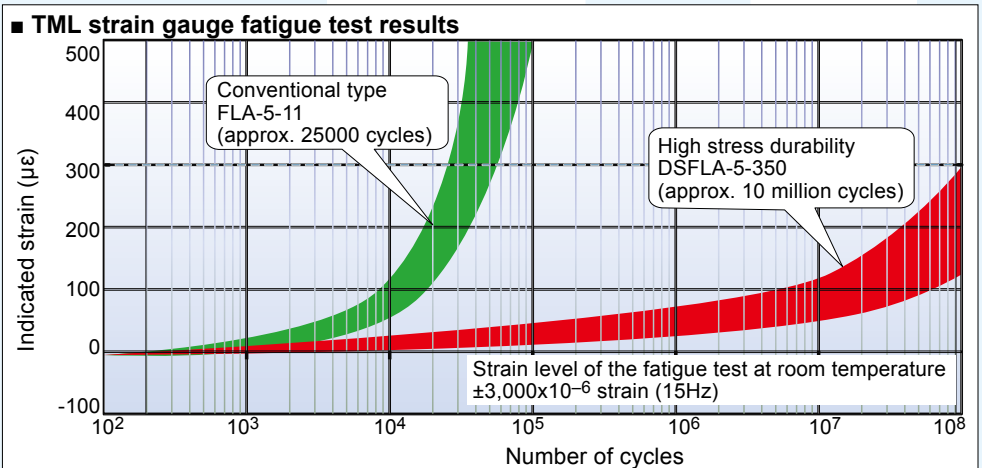

### Fatigue Limit

This number is determined as the number of cycles in case a mechanically repeated strain of  $\pm 3000 \times 10^{-6}$  strain is applied to the strain gauge before the indicated strain changes by  $\pm 300 \times 10^{-6}$  strain.

# ONE-SIDE STRAIN GAUGES series DD

Operating temperature range



These strain gauges are not self-temperature-compensated. It may be necessary to measure a thermal output using a dummy specimen prior to the measurement.



Applicable adhesives

CN	-10 ~ +70°C
P-2	-10 ~ +70°C

## ONE-SIDE STRAIN GAUGES

### Gauge pattern

Thickness of applicable specimen (mm)

### Basic type

Gauge size  
L W

Backing  
a b c


Resist-  
ance  $\Omega$

These gauges are intended for measuring the bending and tensile strains separately by simply bonding the gauges on one side of a plate or beam. It works on the assumption that the strain distribution in the section of the specimen is linear along the height of the section when the section is subjected to both tensile and bending stress. The gauges are effectively used for the measurement of a box construction in structures such as bridges or pressure vessels, where the reverse side of the measurement object is not accessible for strain gauge installation.

Example of type number designation  
**DD-1-15 -350 -3LJB**

- DD-1-15: Basic strain gauge type
- 350: Gauge resistance
- 3LJB: Length in meter and type of leadwire

Each package contains 5 gauges.

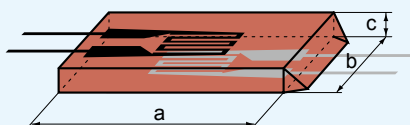

Approx. 5 or less	DD-1-15	3	2.9	15	7	1	350
Approx. 5~10	DD-2-30			30	7	2	