

# XFC200R Miniature Load Cell



- Range from 0-2N to 0-10kN [0-0.4 lbf to 0-2 klbf]
- Compression
- High Stiffness
- Integrated Spherical Load Button
- For Static and Dynamic Applications
- High Overload Capacity

## DESCRIPTION

The miniature size and lightweight of the XFC200R facilitates testing where these conditions are necessary. Unlike sensors with flat force application surfaces, the XFC200R incorporates a spherical load button resulting in more precise measurements. Its high stiffness, for the size and measurement ranges, allows measurements in dynamic applications. A strain relief spring strengthens the cable output. The sensing element is fitted with a fully temperature compensated Wheatstone bridge equipped with high stability micro-machined silicon strain gages.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

## FEATURES

- High accuracy for low ranges
- Integrated Spherical Load Button
- High Stiffness
- Small design
- Other designs available on request

## APPLICATIONS

- Robotics and effectors
- Micro component assembly tools
- Keyboard and phone buttons control
- Laboratory
- Mechanical switches control

## STANDARD RANGES

Range in N	2 - 5	10 - 20 - 50	100 - 200	500 - 1000	2k	5k - 10k
Range in lbf	0.4 - 1	2 - 4 - 10	20 - 40	100 - 200	400	1k - 2k
Stiffness in N/m	$3.7 \times 10^5$ to $1.4 \times 10^6$	$6.1 \times 10^6$ to $6.6 \times 10^7$	$1.1 \times 10^8$ to $3.2 \times 10^8$	$2.1 \times 10^8$	$7.3 \times 10^8$	$1.2 \times 10^9$ to $2.2 \times 10^9$
Stiffness in lbf/ft	$2.5 \times 10^4$ to $9.6 \times 10^4$	$4.2 \times 10^5$ to $4.5 \times 10^6$	$7.5 \times 10^6$ to $2.2 \times 10^7$	$2.9 \times 10^7$ to $1.4 \times 10^7$	$5.0 \times 10^7$	$8.2 \times 10^7$ to $1.5 \times 10^8$
Materials	Aluminum		Stainless Steel	Aluminum	Stainless Steel	

# XFC200R Miniature Load Cell

## PERFORMANCE SPECIFICATIONS

All values are typical at temperature 20±1° C

PARAMETERS	
Operating Temperature Range (OTR)	-40 to 120° C [-40 to 248° F]
Compensated Temperature Range (CTR)	0 to 60° C [32 to 140° F]
Zero Shift in CTR	<2% F.S. / 50° C [100° F]
Sensitivity Shift in CTR	<2% of reading / 50° C [100° F]
Range (F.S.)	0-2 N to 0-10 kN [0-0.4 lbf to 0-2k lbf]
Over-Range	
Without Damage	2 to 4 x F.S.
Without Destruction	3 to 6 x F.S.
Accuracy	
Linearity	≤±0.5% F.S.
Hysteresis	≤±0.5% F.S.

## Electrical Characteristics



Model	XFC200R
Supply Outage	10Vdc
F.S. Output	100 mV typical (50 mV for 500 N; [100 lbf ] model)
Zero Offset	<±10 mV
Input Impedance/Consumption	1000 to 3000Ω
Output Impedance	500 to 1000Ω
Insulation under 50Vdc	≥100MΩ

## Notes

1. Electrical Termination: Shielded cable with 4 Teflon wires (AWG36/28), standard length 2 m [6.5 ft] with strain relief spring
2. Material: Body in stainless steel or aluminum alloy
3. Protection Index: IP50

# XFC200R Miniature Load Cell

## DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)

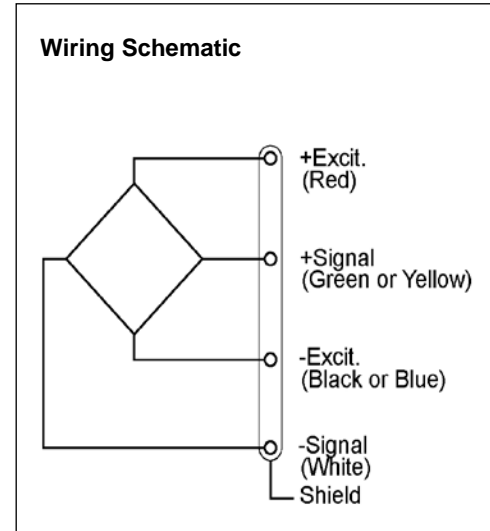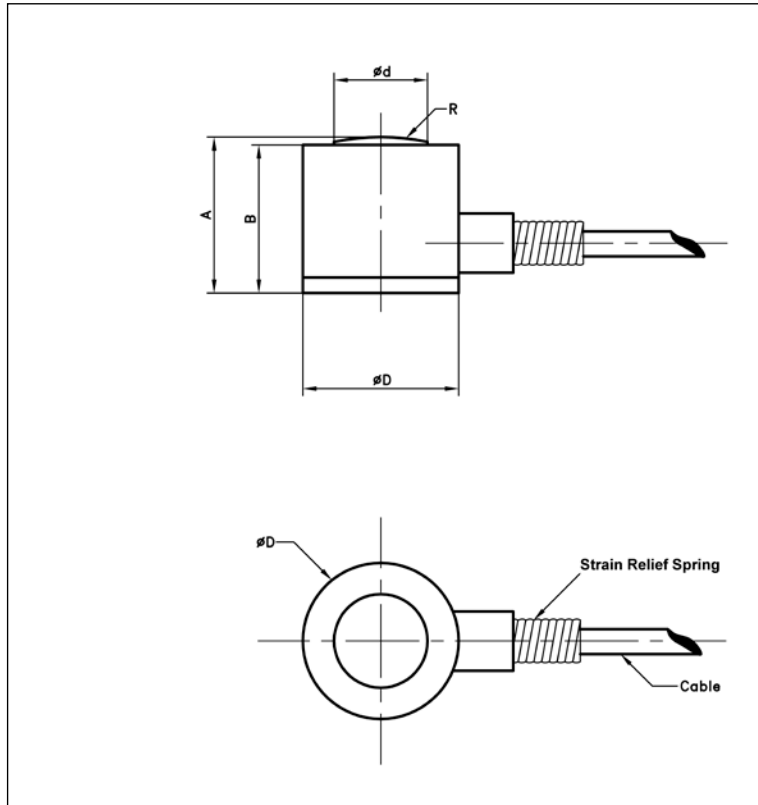

Dimensions in mm [inch]

F.S. Ranges in N [in lbf]	2-5 [0.4 - 1]	10 - 20 -50 [2 - 4 - 10]	100 - 200 [20 - 40]	500 - 1000 [100 - 200]	2000 [400]	5000 - 10000 [1000 - 2000]
A	10 [0.39]					16 [0.63]
B	9,5 [0.37]					15 [0.59]
Diameter D	10 [0.39]					16 [0.63]
Diameter d	3 [0.12]	5 [0.2]		6 [0.24]		12 [0.47]
R	15 [0.59]					30 [1.18]
Material	Aluminum	Aluminum	Stainless steel	Aluminum	Stainless steel	Stainless steel
Stiffness in lbf/ft	2.5x10 <sup>4</sup> to 9.6x10 <sup>4</sup>	4.2x10 <sup>5</sup> to 4.5x10 <sup>6</sup>	7.5x10 <sup>6</sup> to 2.2x10 <sup>7</sup>	2.9x10 <sup>7</sup> to 1.4x10 <sup>7</sup>	5.0x10 <sup>7</sup>	8.2x10 <sup>7</sup> to 1.5x10 <sup>8</sup>
Over range w/o damage	x4	x4	x3	x2	x2	x2
Over range w/o destruction	x6	x6	x5	x3	x3	x3


# XFC200R Miniature Load Cell

## OPTIONS

<b>ET1</b>	: CTR -20 to 100° C [-4 to 212° F]
<b>ET2</b>	: CTR -40 to 120° C [-40 to 248° F]
<b>ET3</b>	: CTR -40 to 150° C [-40 to 302° F] OTR=CTR
<b>HA</b>	: Accuracy (CNL&H) $\leq \pm 0.5\%$ F.S.
<b>L00M</b>	: special cable length, replace "00" with total length in meters
* Order Flat Force application surface with reference <b>XFC200</b> .	

## ORDERING INFO

XFC200R - 10KN - /HA/ET1

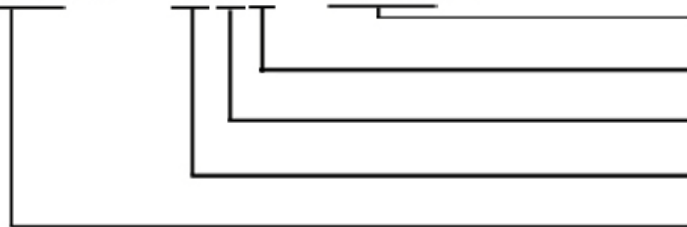

Other Options (HA, ET1, ET2, etc.)

Unit (N=Newtons)

Multiplier (K for ranges >1000)

Range

Model

### NORTH AMERICA

Measurement Specialties, Inc.  
Vibration Design Center  
32 Journey - Suite 150  
Aliso Viejo, CA 92656  
United States USA  
Tel: 1-949-716-0877  
Fax: 1-949-916-5677  
[t&m@meas-spec.com](mailto:t&m@meas-spec.com)

### EUROPE

Measurement Specialties  
(Europe), Ltd.  
26 Rue des Dames  
78340 Les Clayes-Sous-Bois,  
France  
Tel: +33 (0) 130 79 33 00  
Fax: +33 (0) 134 81 03 59  
[pfg.cs.emea@meas-spec.com](mailto:pfg.cs.emea@meas-spec.com)

### ASIA

Measurement Specialties  
(China), Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen  
518057  
China  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
[pfg.cs.asia@meas-spec.com](mailto:pfg.cs.asia@meas-spec.com)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.