

86C2

Piezoresistive Accelerometer Uniaxial, screw mount



Features

The **Model 86C2** Accelerometer is a compact, factory calibrated uniaxial device based on piezoresistive technology. Its housing has a flat design for easy screw mount. Due to its low mass this model is perfect for testing light weight structures. Ranges from $\pm 50\text{ g}$ to $\pm 2000\text{ g}$ and high frequency response, this sensor also meets the specification SAE J211. The sensing element has integrated overload stops which guarantees high shock performance. Signal amplified versions are optional.


- ☐ Advanced MEMS Sensing Element
- ☐ Wheatstone Bridge
- ☐ Specification SAE J211
- ☐ Ranges $\pm 50\text{ g}$ to $\pm 2000\text{ g}$
- ☐ $\pm 25\text{ mV}$ Zero Measurement Output typ.
- ☐ 2–10 VDC Excitation
- ☐ Gas Damping
- ☐ Mechanical Overload Stops
- ☐ Screw Mount
- ☐ Low Cost

Applications

- ☐ Crash Testing
- ☐ Vibration & Shock Monitoring
- ☐ Impact Testing
- ☐ Road Testing
- ☐ Transportation Testing

Service

- ☐ Sinusoidal Calibration
- ☐ Pendulum Calibration
- ☐ Connector Options
- ☐ Signal Conditioning
- ☐ Repair Options
- ☐ ID-Module Options

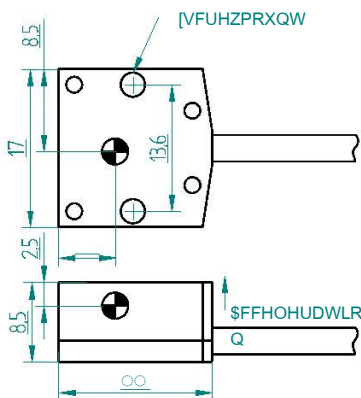

86C2

Piezoresistive Accelerometer / uniaxial, screw mount

Individual Technical Data

All values are typical at +24°C and 5VDC excitation

86C2				
Range (g)	Sensitivity ¹ (mV/g)	Frequency Response (±5%) (Hz)	Damping Ratio ³	Shock Limit ² (g)
±50	1.0	0 – 600	0.40 – 0.9	10,000
±100	0.5	0 – 800	0.40 – 0.9	10,000
±200	0.4	0 – 1000	0.20 – 0.6	10,000
±500	0.2	0 – 1200	0.20 – 0.6	10,000
±2000	0.08	0 – 2500	0.05 – 0.3	10,000

- 1) Output is ratiometric to excitation voltage
Signal conditioning optional
Calibration data incl.: sensitivity at 80Hz / 5Vdc, offset, bridge resistance
- 2) 10,000g shock limit in normal axis, 5,000g in transverse axes
- 3) Damping behavior varies with cable, mounting or gluing

General Technical Data

86C2 Performance		
Supply Voltage	(VDC)	2 to 10
Ranges	(g)	50 to 2000
Non-Linearity typ.	(%)	±1% FSO
Transverse Sensitivity	(%)	<3
Zero Acceleration Output (differential) typ.	(mV)	±25
Input and Output Resistance	(N)	2400 – 6500
Thermal Zero Shift typ.	(%FSO/°C)	-0.09
Thermal Sensitivity Shift typ.	(%/°C)	-0.15
Operating Temperature	(°C)	-20 to 90
Storage Temperature	(°C)	-40 to 100
Weight Housing	(g)	6
Cable	(g/m)	nom. 6,5, 87 Shore A, Polyurethane
Material Housing		Aluminium, hard anodized

Order Information			
86C2-XXX-XXX			
1	2	3	
1 Model			
2 Range			
3 Cable Length and Pinout			

Cable Code	
Supply +	Red
Supply -	Black
Output +	Green
Output -	White

