





Product Catalog

imc Test and Measurement Solutions

Our Vision is ...

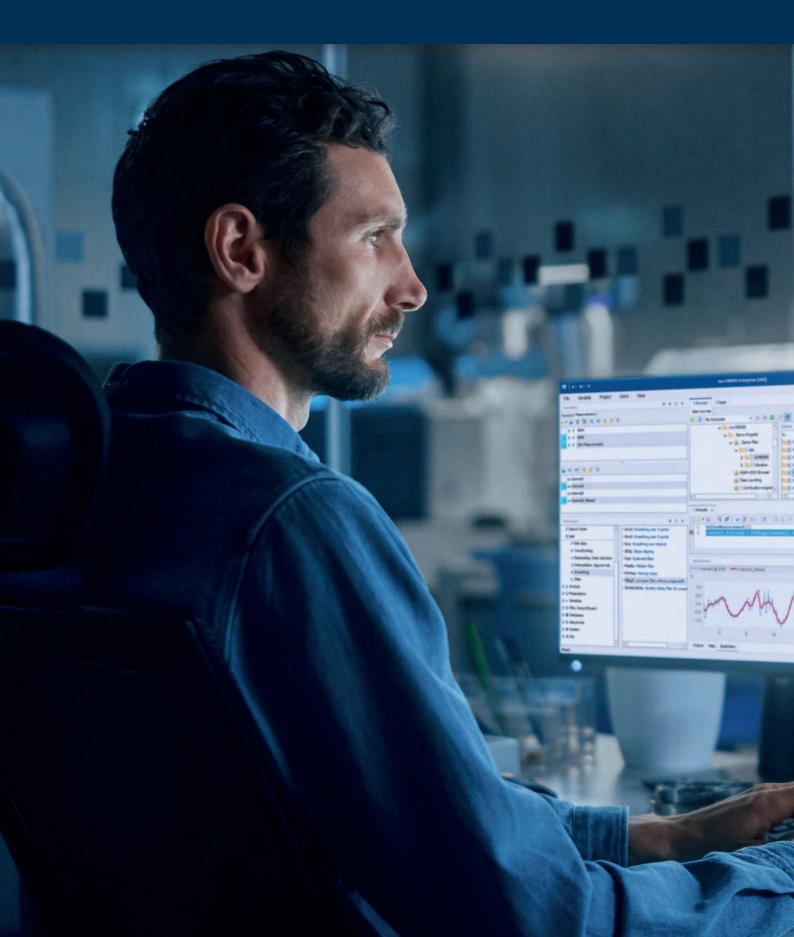

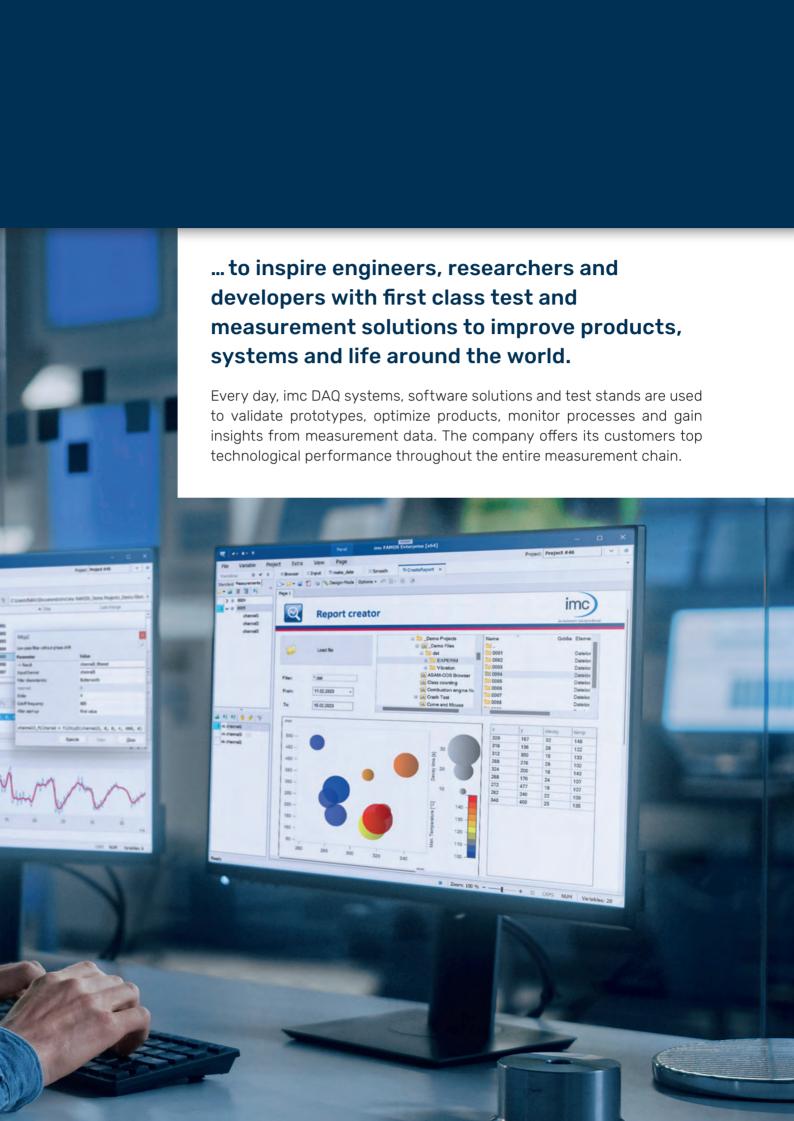

Contents

Data Acquisition Systems
Powerful, compact and scalable DAQ system – imc ARGUSfit
Rugged Data Acquisition System – imc CRONOS-XT
High-Speed Data Acquisition and Transient Recorder – imc EOS
CAN Based Data Acquisition
Intelligent Multi-Bus Data Logger – imc BUSDAQflex
Software
Integrated Software for the Entire Testing Process – imc STUDIO
Telemetry Solutions
One Channel Telemetry Systems55Universal Telemetry System for up to 24 Channels55Modular Telemetry Systems54
Sensor Solutions
Measuring Temperatures on the Brake Disc - D*-BrakeTemp60Wireless Wheel Speed Acquisition - D*-Speed.6Mechanical Power Measurements on Shafts - D*-Power.64Robust Wheel Force Transducers - WFT-C*.66Wireless Wheel Torque Transducer - WTT-D*.68High-Precision Steering Effort Sensor.70
Services 7'



The imc Product Portfolio

DAQ SYSTEMS

The core of the product portfolio consists of imc's modular data acquisition and control systems that are fit for test stand and laboratory applications as well as mobile data acquisition in harsh environments.

SENSORS AND TELEMETRY

The imc DAQ hardware can be supplemented by custom-tailored telemetry and automotive sensor systems which enable engineers to capture data, even from rotating parts.

SOFTWARE


The imc software covers the entire test and measurement process - from data acquisition to live monitoring and test stand automation. Powerful tools help you analyze and manage your test and measurement data and create professional test reports.

SERVICES


We offer a range of unique services, from consulting and training to customized test solutions and test benches, ensuring that our customers have everything they need to validate prototypes and products, monitor processes and machines, and collect data to gain insights.

imc ARGUSfit

Powerful, compact and scalable DAQ system

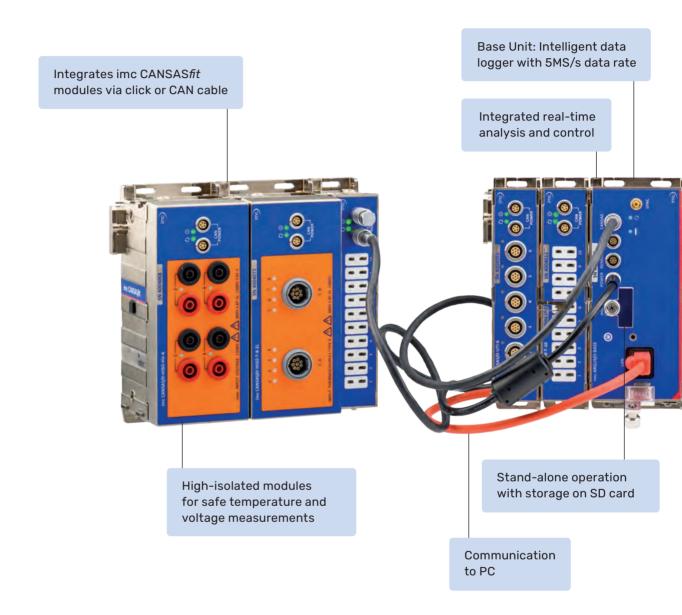

imc ARGUSfit is a **POWERFUL**, **ULTRA-COMPACT** and **FLEXIBLE** DAQ system where you easily connect the modules with a click mechanism. With high channel density, compact design, and stand-alone operation, it enables precise measurements in a wide range of applications – from prototype testing to monitoring machines and equipment.

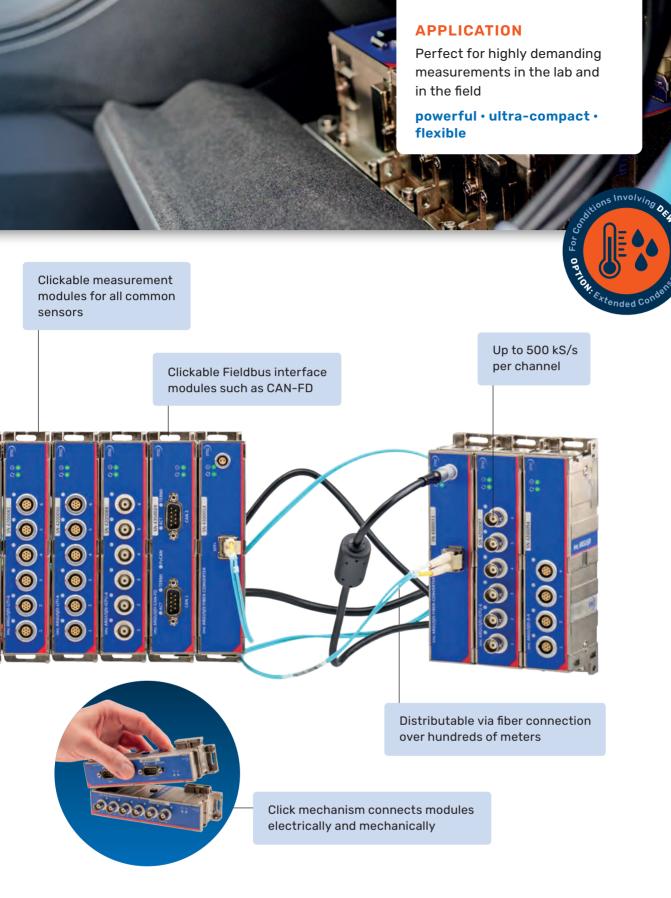

With its **SCALABLE** design the DAQ system can grow with your needs. Expand its capabilities effortlessly with additional modules for analog inputs or fieldbus interfaces. Synchronously capture a wide variety of signals – whether analog sensors or digital data such as CAN-FD – and perform **REAL-TIME ANALYSIS** directly in the device.

imc ARGUSfit Details

imc ARGUSfit base unit

General*	
Total data rate	5 MS/s
Connectivity	
Ethernet (RJ-45)	Gigabit Ethernet
W-LAN (WiFi)	optional (in preparation)
GPS connection port	•
Synchronization port	•
Remote controlled main switch	•
CANSAS fit port	•
CANSAS fit modul connector (click connection)	•
ARGUSfit modul connector (click connection)	•
Data storage	
Internal storage on removable media	micro SD up to 256 GB
External storage on PC / network (NAS)	via Ethernet
Stand-alone capabilities	
Stand-alone operation	•
Auto data-saving upon power outage	•
UPS	Super-Caps
UPS coverage	ARGET-BASE
Data Acquisition & Real-Time Fuction	AROTT BAGE
Max. aggregate sampling rate	5 MS/s
Max. channel sampling rate	depends on module type
Max. active channels within a system	1000
Channel individual sampling rates	selectable in 1–2–5 steps
Number of sampling rates	·
Monitor channels (for all channels)	any
Pre-processing for monitor channels	
Intelligent trigger functions	
Multi triggered data acquisition	max. 8
Real-time data analysis platform (imc Online FAMOS)	
Synchronization & clock	
Master-slave between different imc systems	•
NTP network based synchronization	•
PTP network synchronization	in preperation
IRIG-B via external signal	•
Power	
Input supply voltage	10 - 50 V DC
AC/DC power adapter (110 to 230VAC)	•
Shutdown threshold	≤8.5 V
Power consumption	3.3 W (typ.)
Isolation	60 V
Environmental	
Operating temperature range	-40°C to +85°C
Shock and vibration resistance	IEC 60068-2, IEC 61373 IEC 60062-2-64 category 1, class A and B MIL-STD-810 Rail Cargo Vibration Exposure U.S. Highway Truck Vibration Exposure
IP rating	IP50
Housing	
Dimensions	153 x 62 x 53 mm
Weight	0.5 kg



Real-time Data Analysis Included

imc Online FAMOS is a powerful extension included in every imc ARGUSfit DAQ system as a standard without any additional license required. It offers a variety of realtime functions for pre-processing and signal analysis. The mathematical analysis functions are executed on the signal analysis platform integrated in the measurement device. This means that analysis results are available immediately and also independently of the PC. Such pre-processing can also yield significant data reduction and thus reduce the amount of data to be exchanged between the DAQ system and the PC. The results are available in imc STUDIO as virtual channels.

Key: Default

imc ARGUSfit Modules

40
"

UTI-6*

Isolated universal voltage amplifier with sensor supply

Voltage (25 mV to 60 V), Current (20 mA sensors) Input types: Temperature (PT100, PT1000)

Resistance (e.g. NTC)

Channels: 6 ADC: 24-bit

100 kS/s per channel Sampling rate

+/- 2.5V ... +/-15V individually configurable per channel, 0.5W per channel, 2W per module Sensor Supply



B-4*

Universal isolated bridge mode and strain gauge amplifier with sensor supply

Strain gauges, bridge-mode sensors,

potentiometers Voltages (25 mV to 10 V) Input types:

Active transducers that require voltage supply

Channels: 4 ADC: 24-bit

Sampling rate 100 kS/s per channel

imc LEMO Terminal Plug



ICPU-6*

Isolated amplifier for voltage and IEPE sensors

IEPE or ICP sensors (current fed sensors 4 mA) Input types: Voltage (25 mV to 60 V)

6 Channels: ADC: 24-bit

Sampling rate 500 kS/s per channel



CAN-FD*

Isolated fieldbus modul for CAN FD

Number of CAN ports: 2

Connection: DSUB-9

CAN FD (ISO 11898-1:2015) 8 MBaud Protocols: CAN High Speed (ISO 11898) 1 MBaud CAN Low Speed (ISO 11519) 125 KBaud

Direction: sending and receiving



2 converter modules, 2x SFP+ transceiver, 5 m fiber optic cable,

AC/DC power adaptor and a power cable



UPS-NIMH*

Set includes:

UPS for imc ARGUSfit and imc CANSASfit to bridge short-term power failures

Buffering: Entire imc ARGUSfit system

Total Power: 50 W

Battery technology: Robust NiMH

30 sec. (several times) Buffer time:

External devices: Buffering via auxiliary power output



For operating conditions involving dew point

















imc CRONOSflex

Frameless Modular Data Acquisition System

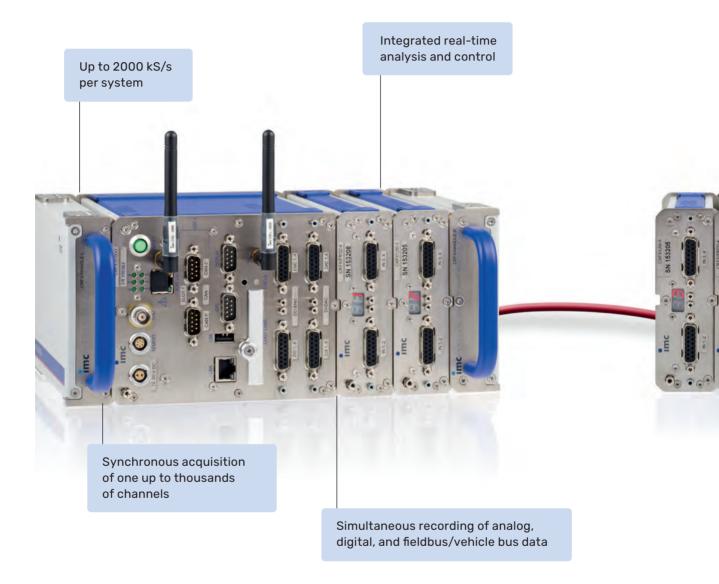

imc CRONOS flex offers you more **FLEXIBILITY** for your daily changing test tasks. By clicking imc CRONOS flex modules to a base unit, you've created a complete system, with exactly the number of channels you need. No cables between cards, no half empty mainframe rack, and no expansion chassis to squeeze in one more channel.



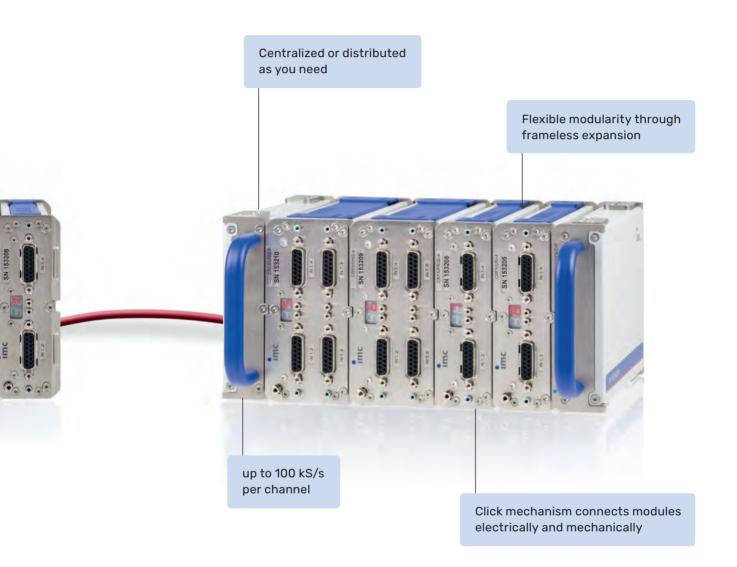

A perfect fit for daily changing requirements on test stands and bench tops, to mobile testing environments, the **MODULAR DAQ & CONTROL** system provides you with the versatility you need, over a diverse range of measurement and control tasks, but without the need to make any sacrifices of performance or ease of use.

imc CRONOS*flex* Details

imc CRONOSflex base unit

	CRFX-400	CRFX-2000GP
General		
Aggregate sampling rate	400 kSps	2000 kSps
Operating conditions		
Standard operating temp. range	•	•
Extended temp. range (incl. condensation)	0	0
Shock and vibration rating	MIL 81	0F (40g)
Connectivity		
Ethernet	100 MBit	1 GBit
W-LAN (WiFi) IEEE 802.11.g (54 Mbit/s)	0	0
Dual band IEEE 802.11.n (300 Mbit/s)		0
EtherCAT distributable system bus	•	•
GPS connection port	•	•
Display connection port	•	•
Remote controlled main switch	•	•
Programmable status feedback (LEDs)	•	•
Isolated SYNC signal	•	•
Data storage		
CF card slot (Compact Flash)	•	
CFast card slot		•
USB 2.0 host port (external removable storage)		•
Storage on PC / network drive (NAS)	•	•
SSD (internal)	0	0
Stand-alone capabilities		
PC independent complex trigger functionality	•	•
Onboard real-time data analysis (imc Online FAMOS)	•	•
Autarkic PC-less operation, self start	•	
Synchronization & clock		
Master-slave between different imc systems		•
NTP network based synchronization		
PTP network synchronization (precision)		
Via external GPS signal, IRIG-B or DCF-77		
Field bus extensions CAN, CAN FD	0	0
LIN	0	0
FlexRay	0	0
MVB, IPTCom	0	0
Profinet, Profibus	0	0
Modbus (RTU, TCP)	0	0
ARINC	0	0
XCPoE (Master, Slave)	0	0
EtherCAT Slave	0	0
Multi-functional I/O extension of base unit		
Digital in/out, pulse counter, analog out	0	0
Power supply		
DC input 10V to 50V	•	•
AC/DC adapter (110 to 230VAC)	•	•
Supply of remote modules via Power-over-EtherCAT	•	•
Data integrity upon power fail	•	•
UPS (NiMH battery)	0	0
UPS (extended capacity Li-lon)	0	0



imc CRONOSflex analog amplifier modules

	siz	:e	connecto	r		spe	eed		voltage	mod	de		curr	ent	tei	mp	ICP,	char	ge, s	supp	lies		ا	brid	ge m	ode	
module name CRFX/xxx	channels	width (type)	standard connector	LEMO version available	TEDS	max. sampling rate (per channel)	signal bandwidth (-3dB)	isolated voltage mode	min. voltage range (mV)	voltage up to 10 V	voltage up to 50/60 V	voltage up to 1000 V	20 mA internal shunt	20mA shunt plug	Thermocouple (TC)	RTD (PT100)	IEPE mode integrated	IEPE plug	sensor supply	(per channel)	full bridge	half bridge	quarter bridge	DC excitation	AC excitation (CF)	single SENSE	double SENSE
Voltage measur		t																									
LV3-8	8	1	DSUB-15	0		100 kHz	48 kHz		5	•								0	0								
Voltage & temp	eratur	e me	asurement																								
IS02-8	8	1	DSUB-15	0		100 kHz	11 kHz		50									0	0								
IS02-8-2T	8	2	Thermo			100 kHz	1 kHz																				
IS02-16-2T	16	2	Thermo			100 kHz	1kHz																				
IS02-8-L	8	2	LEMO.1B			100 kHz	11 kHz		50										0								
ISOF-8	8	1	DSUB-15	0		100 kHz	48 kHz		50									0	0								
HISO-8-L	8	3	LEMO.1P REDEL			100 kHz	11 kHz	•	50																		
HISO-8-T-L	8	3	LEMO.2P REDEL			100 kHz	1 kHz																				
High voltage me	easure	men	t 600V CAT III																								
HV2-4U	4	3	Banana			100 kHz	48 kHz	•	2,500	•		•															
HV-2U2I (I-chan)	4	3	Banana/ Terminal blocks		•	100 kHz	48 kHz	•	2,500/ 50		•	•															
Audio & vibratio	n mea	sure	ments																								
ICPU2-8	8	2	BNC			100 kHz	48 kHz		5																		
AUDI02-4	4	2	BNC			100 kHz	48 kHz		5																		
Bridge & strain	gauge	mea	surements																								
BR2-4	4	1	DSUB-15	0		100 kHz	14 kHz		5									0									
B-8	8	2	DSUB-15	0		100 kHz	48 kHz		5									0									
BC-8	8	1	DSUB-26-HD			100 kHz	48 kHz		5																		
DCB2-8	8	2	DSUB-15	0		100 kHz	5 kHz		5									0									
DCBC2-8	8	1	DSUB-26-HD			100 kHz	5 kHz		5																		
For universal us	e																										
UNI2-8	8	2	DSUB-15	0		100 kHz	48 kHz		5									0									
UNI-4	4	1	DSUB-15	0		100 kHz	48 kHz		2.5									0									•

imc CRONOSflex DIO, pulse counter, DAC modules

IIIIC CKC	JNUSITE.	x Dio, puise c	Journ	itei	, DA	C II	iou	lule	:5		
	size	connector	(digita	al I/O		DAC		pul	se counter	
module name CRFX/xxx	width	standard connector	input Bits	high voltage	output Bits	high current	analog outputs	counter inputs	quadrature mode chan	counter frequency	analog sin/ cos mode
Base unit extension											
DI16-D08-ENC4	+40mm	DSUB-15	16		8			4	2	32 MHz	
DI8-D08-ENC4-DAC4	+40mm	DSUB-15	8		8		4	4	2	32 MHz	
flex modules: pulse co	unter										
HRENC-4	1	DSUB-15						4	4	256 MHz	
flex modules: digital l	/0, DAC ⁽										
DI2-16	1	DSUB-15	16								
DI2-32	2	DSUB-15	32								
DO-16-HV (110V)	2	Terminal blocks	16								
D0-16-HC	1	DSUB-15			16						
D0-32-HC	2	DSUB-15			32						
DI2-16-D0-16-HC	2	DSUB-15	16		16						
DAC-8	1	DSUB-15					8				
D0-16-HC-DAC-8	2	DSUB-15			16		8				
Real-time control mo	dules (PID	, simulation, cus	tom s	olut	ions)						
SYNTH-8	1	8 independent PII) cont	roller	r, arbit	rary	sign	al ge	enerat	or (synthesiz	er)
APP-MOD	1	custom programm	nable r	eal-ti	ime ap	plic	ation	s, H\	W-inter	face integra	tions

TEDS support (Transducer Electronic Data Sheet)

imc CRONOSflex modules support direct read/write of TEDS sensors, including imc's TEDS Clip. Connectors: TEDS interfaces require either the ACC /DSUBTEDS-x variants of our connectors or per-channel connectors such as Lemo. "IEPE" type TEDS is supported in audio modules with direct BNC input connectors.

Digital I/O

galvanically isolated, configurable to 24V/5V (TTL/CMOS) Level, output: 0.7A sink, high current: sink and source 0.7A

Pulse Counter

full analog input conditioning: 500 kHz analog bandwidth, differential input, analog filter, software adjustable threshold levels Modes: event counter, time, frequency, speed, RPM differential and absolute angle and displacement

Key:

■ Default,

○ Optional, (

●) Restricted

imc CRONOScompact


Adaptable Data Acquisition and Control System

Onboard real-time data analysis and reduction

Data acquisition and realtime control in one unit



Also available as 19" rack version for fixed installation

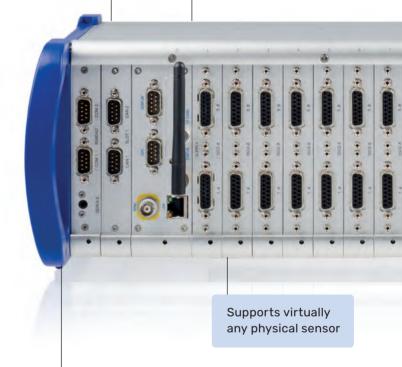

Synchronous recording of analog, digital and industrial field/vehicle bus in one system

The imc CRONOScompact is the single MOST COMPREHENSIVE DAQ and control system for electromechanical testing on the market today. Integrating measurement and real-time control into one housing provides you with the reliability of absolute synchronization, and the convenience of having all of your tools in one place.



Modular reconfigurable hardware adaptable to changing testing requirements



Expandable via plug-in modules or distributed synchronous CRFX modules (EtherCAT based)

Portable version with optional battery pack



Standalone, remote or interactive operation

Incorporating the complete range of modular I/O choices and INTEGRATED SIGNAL CONDITIONING, imc CRONOScompact provides the versatility and broad range of capabilities that allow you to achieve the highest levels of productivity in your testing. All this capability is available in MODULAR AND RECONFIGURABLE compact housings or 19" rack systems.

imc CRONOScompact Details

imc CRONOScompact mainframe/housing

	CRC-400 & rack variants	nts
	00 aria	CRC-400GP & rack variants
	2-40 ack v	2-40 ack v
	& ra	CRC 8 ra
General		
Housing type	portable & 19" rack	portable & 19" rack
Extension module slots	8/11/13/17	7/10/12/16/17
Aggregate sampling rate	400 kSps	400 kSps
external imc CRONOS <i>flex</i> moduls (CRFX)		0
aggregate sampling rate (incl. ext. CRFX modules)		2000 kSps
Operating conditions		
Standard operating temp. range	•	•
Extended temp. range (incl. condensation)	0	0
Shock vibration rating	MIL 810	OF (40g)
Connectivity		
Ethernet	100 MBit	1 GBit
int. WiFi adapter IEEE 802.11.g (54 Mbit/s)	0	0
Dual Band IEEE 902.11.g (300 Mbit/s)		0
GPS connection port	•	•
Display connection port	•	•
Remote controlled main switch	•	•
Programmable status feedback (LEDs)	•	•
Data storage		
CF card slot (Compact Flash)	•	
Storage on PC / network drive (NAS)	•	•
CFast, USB host		0GP
SSD (internal)	0	0
Stand-alone capabilities		
PC independent complex trigger functionality		
Onboard real-time data analysis (imc Online FAMOS) Autarkic PC-less operation, self start		
Synchronization & clock		
Master-slave between different imc systems	•	
NTP network based synchronization	•	•
PTP network synchronization (precision)		•
Via external GPS signal	•	•
Via external IRIG-B & DCF-77 signal	•	•
Field bus extensions		
CAN, CAN FD	0	0
LIN	0	0
FlexRay	0	0
MVB, IPTCom	0	0
ARINC	0	0
XCPoE (Master, Slave)	0	0
EtherCAT Slave	0	0
Power supply		
DC input 10V to 50V	•	•
Isolated power supply input	•	•
AC/DC adapter (110 to 230VAC)	•	•
AC input (110 to 230VAC)	for AC RACK	for AC RACK
Data integrity upon power fail	•	•
UPS	•	•
UPS (extended range Li-Ion)	0	0



imc CRONOScompact analog amplifier modules

	siz	e	connecto	or		spe	ed		voltag	e mod	le		curr	ent	te	mp	ı	CP, s	uppl	у		ı	orid	ge m	ode		
module name GRC/xxx	channels	slots (1 slot = 4 HP)	standard connector	LEMO version available	TEDS	max. sampling rate (per channel)	signal bandwidth (-3dB)	isolated voltage mode	min. voltage range (mV)	voltage up to 10 V	voltage up to 50 / 60 V	voltage up to 1000 V	20 mA internal shunt	20mA shunt plug	Thermocouple (TC)	RTD (PT100)	ICP mode integrated	ICP plug	sensor supply	(per channel)	full bridge	half bridge	quarter bridge	DC excitation	AC excitation (CF)	single SENSE	double SENSE
Voltage measurer	nent																										
LV-16	16	2	DSUB-15			20 kHz	6.6 kHz		250									0	0								
LV3-8	8	1	DSUB-15	0		100 kHz	48 kHz		5									0	0								
Voltage & temper	ature	mea	surement																								
0SC-16	16	2	DSUB-15			5 Hz	1 Hz		50										0								
0SC-16-2T	16	2	Thermo			5 Hz	1 Hz																				
C-8	8	1	DSUB-15			20 kHz	20 Hz		2.5										0								
C8-2T	8	1	Thermo			20 kHz	20 Hz																				
IS02-8	8	1	DSUB-15	0		100 kHz	11 kHz		50									0	0								
IS02-8-2T	8	1	Thermo			100 kHz	1 kHz																				
IS02-8-L	8	2	LEMO.1B			100 kHz	11 kHz		50										0								
ISOF-8	8	1	DSUB-15	0		100 kHz	48 kHz		50	•								0	0								
High voltage mea	suren	nent	600V CAT III																								
HV2-4U	4	2	Banana			100 kHz	48 kHz		2,500																		
HV2-2U2I	4	2	Banana / Terminal blocks		•	100 kHz	48 kHz	•	2,500/ 50	(•)																	
Audio & vibration	meas	urem	ents																								
ICPU2-8	8	2	BNC			100 kHz	48 kHz		5																		
ICPU-16	16	4	BNC			20 kHz	6.6 kHz		250																		
Bridge & strain ga	uge r	neasi	urements																								
BR2-4	4	1	DSUB-15			20 kHz	8.6 kHz		5									0	(•)								•
B-8	8	2	DSUB-15	0		100 kHz	48 kHz		5									0									
BC-8	8	1	DSUB-26-HD			100 kHz	48 kHz		5																		
DCB2-8	8	2	DSUB-15	0		100 kHz	5 kHz		5									0									
DCBC2-8	8	1	DSUB-26-HD			100 kHz	5 kHz		5					•													
For universal use																											
UNI2-8	8	2	DSUB-15	0	•	100 kHz	48 kHz		5					•				0	•								
UNI-4	4	1	DSUB-15	0		100 kHz	48 kHz		2.5									0									

imc CRONOScompact DIO, pulse counter, DAC modules

	size	connector	d	ligit	al I/O		DAC		puls	e counter	
module name	slots (1 slot = 4 HP)	standard connector	input Bits	high voltage	output Bits	high current	analog outputs	counter inputs	quadrature mode chan	counter frequency	analog sin/ cos mode
Multi functional mod	dules										
DI16-D08-ENC4	2	DSUB-15	16		8			4	2	32 MHz	
DI8-D08-ENC4-DAC4	2	DSUB-15	8		8		4	4	2	32 MHz	
Pulse counter modu	les										
HRENC-4	1	DSUB-15						4	4	256 MHz	•
FRQ-4	1	DSUB-15						4		256 MHz	
Digital I/O modules											
DI2-16	1	DSUB-15	16								
DO-16	1	DSUB-15			16						
D0-16-HC	1	DSUB-15			16						
DIO-HV-4 (250V)	2	Terminals	4		4						
Analog out modules	(DAC)										
DAC-8	1	DSUB-15					8				
Real-time control m	odules (F	PID, simulation	, cus	tom	solut	ion	s)				
SYNTH-8	1	8 independent	PID c	ontro	oller, a	rbitr	ary siç	gnal ge	enerat	or (synthes	izer)
APP-MOD	1	custom progra	mmab	le re	al-tim	e ap	plicati	ons. H	W-inte	erface integ	rations

TEDS support

(Transducer Electronic Data Sheet) imc CRONOS*compact* modules support direct read/write of TEDS sensors, including imc's TEDS Clip. TEDS interfaces require either the ACC/DSUB-TEDS-x variants of our connectors (2-wire TEDS), or per-channel connectors such as Lemo. "IEPE" type TEDS is supported in direct IEPE/ICP input modules.

Digital I/O

galvanically isolated, configurable to 24V/5V (TTL/CMOS) Level, output: 0.7A sink, high current: sink and source 0.7A


Pulse Counter

full analog input conditioning 500 kHz analog bandwidth, differential input, analog filter, software adjustable threshold


Modes: event counter, event counter, time, frequency, speed, RPM, differential and absolute angle and displacement


imc CRONOS-XT

Rugged Data Acquisition System

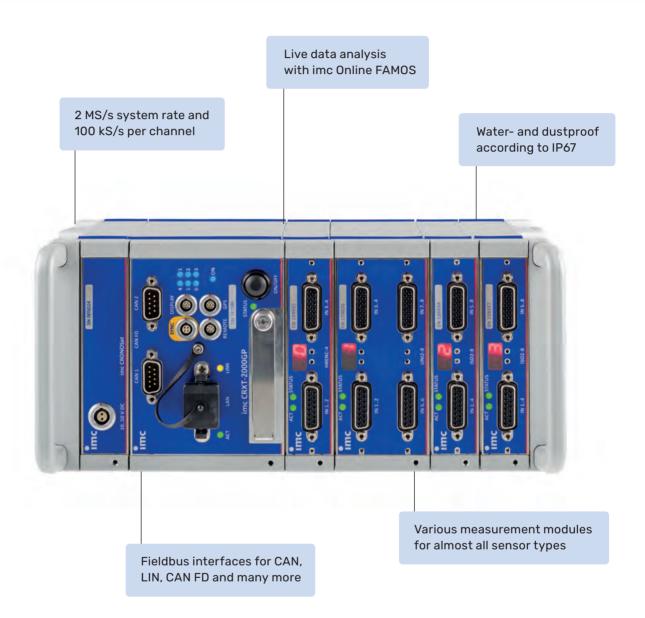

No more compromises: With the imc CRONOS-XT, imc is offering an **ULTRA-ROBUST DAQ** system in a configurable platform. Customize your data acquisition system to your needs. In addition to the base unit (data logger), you can choose from numerous universal and specialized precision measuring amplifiers. With protection class **IP67** and **MIL-STD810F**, the system is protected against dirt, dust and water as well as severe shocks and vibrations.

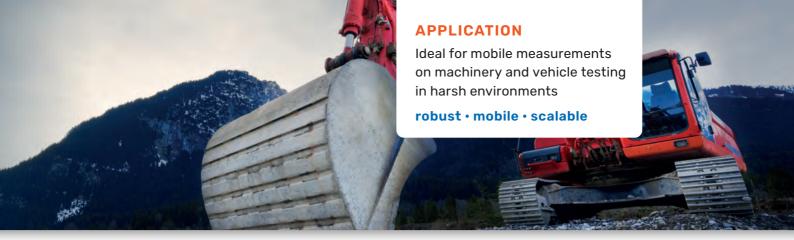

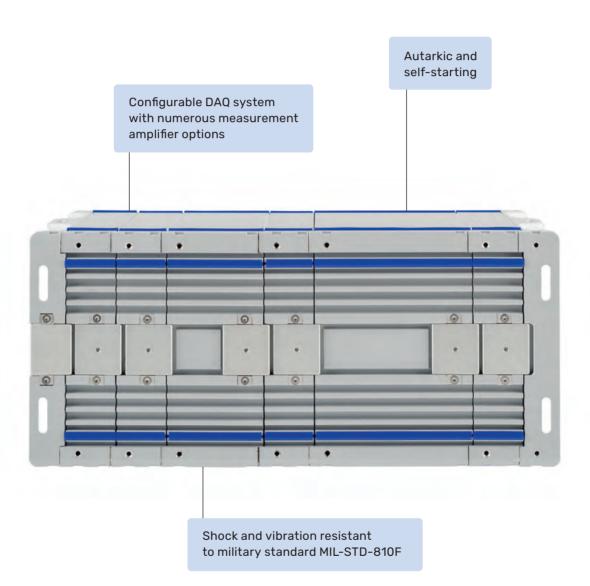

Thanks to the configurable technology, the DAQ system can be ideally adapted to the measurement task at hand. A broad selection of high-precision universal and special measurement amplifiers allow the direct connection of almost all sensor types. The **PRECISE** and low-noise measurement amplifiers digitize with 24 bits and have high bandwidth and range dynamics.

imc CRONOS XT Details

Base unit

	CRXT-2000
General	
System sampling rate	2000 kSps
Operating conditions	
Temperature range	-40 +85°C
Condensation-proof	•
Shock and vibration	MIL 810F
Connectivity	
Ethernet	1 GBit
Internal Wi-Fi adapter IEEE	802.11.n (300 Mbit/s)
EtherCAT connection for di	stributed CRXT blocks
GPS connector	•
imc handheld display	•
Remote control main switch	n •
Programmable LEDs for sta	tus indication
Isolated synchronization sig	gnal
Data storage	
CFast card slot	•
Storage on PC / network dr	ive (NAS)
SSD hard drive (internal)	0
Autonomous device capa	bilities
Complex trigger functionali	ty PC-independent
Onboard real-time data ana	lysis (imc Online FAMOS)
Autarkic operation without PC, se	lf-start (timer, absolute time)
Synchronization & clock	
Master-Slave between imc	systems
NTP and PTP network-base	d synchronization
Via external GPS signal	•
Via external IRIG-B & DCF-7	7 signal
Field bus extensions	
CAN, CAN FD	0
LIN	0
FlexRay	0
MVB, IPTCom	0
Profinet, Profibus	0
Modbus (RTU, TCP)	0
ARINC	0
XCPoE (Master, Slave)	0
EtherCAT Slave	0
XCPoE (Master, Slave)	
EtherCAT Slave	•
AC/DC adapter (110 to 230)	VAC)
Supply of external modules v	via Power-over-EtherCAT
Data integrity in case of po	wer failure



Analog amplifier modules

	siz	e	connector		spe	ed	V	oltage n	node		curr	ent	ter	mp	ICI	P, su	pply	,	br	idge	mo	de					
module name CRXT/xxx	channels	slots	standard connector	TEDS	max. sampling rate (per channel)	signal bandwidth (-3dB)	isolated voltage mode	min. voltage range (mV)	voltage up to 10V	voltage up to 50/60V	20mA internal shunt	20mA shunt plug	thermocouple	PT100	ICP mode integrated	ICP plug	sensor supply	(per channel)	full bridge	half bridge	quarter bridge	DC excitation	AC excitation (5 kHz)	single SENSE	double SENSE		
Voltage measur	remen	it																									
LV3-8	8	1	DSUB-15	•	100 kHz	48 kHz		5	•	•		•				0	0										
Voltage and tem	peratu	ıre																									
IS02-8	8	1	DSUB-15	•	100 kHz	11 kHz	•	50	•	•		•		•		0	0										
IS02-8-L	8	2	LEM0.1B	•	100 kHz	11 kHz		50						•			0										
IS02-16-2T	16	2	Thermo		100 kHz	1 kHz																					
ISOF-8	8	1	DSUB-15	•	100 kHz	48 kHz		50						•		0	0										
ISOF-8-L	8	2	LEM0.1B	•	100 kHz	48 kHz		50									0										
Audio & vibration	n meas	suren	nent																								
ICPU2-8	8	2	BNC	•	100 kHz	48 kHz		5	•	•																	
Bridge and strair	n gaug	e me	asurement																								
BR2-4	4	1	DSUB-15	•	100 kHz	14 kHz		5				•				0	•								•		
B-8	8	2	DSUB-15	•	100 kHz	48 kHz		5				•				0											
DCB2-8	8	2	DSUB-15	•	100 kHz	5 kHz		5	•			•				0	•			•	•						
For universal use	Э																										
UNI2-8	8	2	DSUB-15	•	100 kHz	48 kHz		5						•		0	•		•	•	•						
UNI-4	4	1	DSUB-15		100 kHz	48 kHz		2,5						•		0						•			•		

TEDS-support:

All imc CRONOS-XT amplifiers support TEDS (Transducer Electronic Data Sheet) for automatic sensor recognition and configuration (Plug & Measure functionality). Simply connect the sensor, access TEDS and the channel configuration is ready.

Key: ● standard, ○ optional

Digital inputs and outputs and counter/encoder inputs

	size	connector	digi	ital I/0	DAG C	;	puls	e counter	
module name CRXT/xxx	slots	standard connector	digital input Bits	digital output Bits	analog outputs	counter inputs	quadrature mode chan	counter frequency	analog sin/cos mode
Pulse counter									
HRENC-4	1	DSUB-15				4	4	256 MHz	•
Digital I/O, DAC									
DI2-16	1	DSUB-15	16						
DO-16-HC	1	DSUB-15		16					
DAC-8	1	DSUB-15			8				

Digital I/O: The digital inputs and outputs are galvanically isolated and configurable for 24V / 5V (TTL/COMOS) with a maximum output current of 0.7 A.


Counter: The counter inputs have full analog input conditioning with 500 kHz analog bandwidth (differential input), analog filter and software adjustable switching thresholds. The supported measurement modes are event counter, time, frequency, speed, rpm, angle and distance.



Waterproof DSUB connector plug for universal signal connection

imc SPARTAN

Affordable Multi-Channel Data Acquisition System

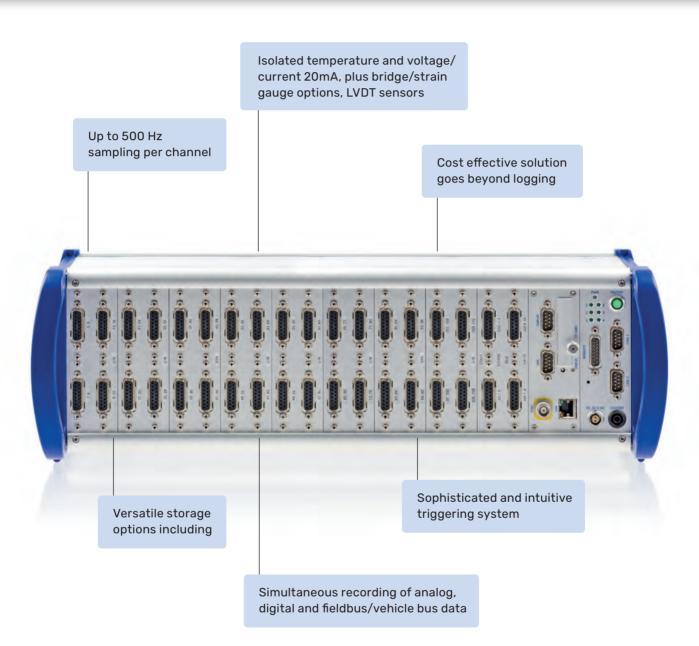

Developed for demanding test applications, imc SPARTAN offers a comprehensive package at surprisingly **LOW PRICE** and even goes far beyond pure data recording. In addition to precision measurement amplifiers with integrated signal conditioning it features multiple sampling rates powerful trigger logic and multiple data storage options as well as an optional real-time computing platform.



Multiple sample rates and synchronous data processing



Integrated real-time capabilities for analysis, data reduction and control

With up to 500 Samples/second per channel, imc SPARTAN offers a dynamic range, well-suited for most physical and mechanical signals. With **UP TO 128 CHANNELS IN ONE SYSTEM** and the possibility to operate several imc devices cascaded and synchronized in one measurement, imc SPARTAN is the perfect choice especially for **MULTI-CHANNEL APPLICATIONS**.

imc SPARTAN Details

imc SPARTAN general specs and housing types

	imc SPARTAN -2 / 4 / 6 / 8	imc SPARTAN -R
	nc S 2 / 4	S ~
	.E 'Y	. <u>:</u> +
General	40010	
Aggregate sampling rate	400 kS	
Max. channel sampling rate	500 Sps /	cnan 19" rack
Housing type Max. number of channels configurable	portable 32/64/96/128	112 (128)
Configurable module slots (1 slot = 4 HP)	4/8/12/16	14 (16)
Operating conditions	4/ 0/ 12/ 10	14 (10)
Standard operating temp. range	•	•
Extended temp. range (incl. condensation)	0	0
Shock and vibration rating	30g pk (3	ms)
Connectivity		
Ethernet	100 ME	Bit
W-LAN (WiFi)	0	0
GPS connection port	•	•
Display connection port	•	
Remote controlled main switch	•	•
Programmable status feedback (LEDs)	•	•
Data storage		
CF card slot (Compact Flash)	•	•
Storage on PC / network drive (NAS)	0	
SSD (internal)	0	0
Stand-alone capabilities	•	•
PC independent complex trigger functionality Onboard real-time data analysis (imc Online FAMOS)	0	0
Autarkic PC-less operation, self start		
Synchronization & clock		
Master-slave between different imc systems		•
NTP network based synchronization	•	•
Via external GPS signal, IRIG-B or "DCF-77	•	
Pulse counter and process control (digital I/O)		
16 Bit digital in, 8 Bit digital out	•	(•)
4 pulse counter (2 chan quadrature mode)	•	(•)
Fieldbus extensions		
Field bus extensions	0	0
CAN, CAN FD	0	0
LIN	0	0
FlexRay	0	0
MVB, IPTCom	0	0
Profinet, Profibus	0	0
Modbus (RTU, TCP)	0	0
ARINC XCPoE (Master, Slave)	0	0
EtherCAT Slave	0	0
Power supply		
DC input 10V to 32V	•	•
Isolated power supply input	•	•
AC/DC adaptor (110 to 230VAC)	•	•
Data integrity upon power fail	•	•
UPS	•	•
Software		
imc STUDIO Standard	0	0
imc REMOTE WebServer	0	0



imc SPARTAN analog amplifier modules

	si	ze	connecto	r	spe	ed	vol	tage i	nod	е	mA	ten	np I	ICP,	sup	ply	k	orid	ge r	nod	e		
module name SPAR/xxx	channels	slots (1 slot = 4 HP)	standard connector	TEDS	max. sampling rate (per channel)	signal bandwidth (-3dB)	isolated voltage mode	min. voltage range (mV)	voltage up to 10 V	voltage up to 50 / 60 V	20 mA shunt plug	Thermocouple (TC)	RTD (PT100)	ICP plug	sensor supply	full bridge	half bridge	quarter bridge	DC excitation	AC excitation (CF)	single SENSE	double SENSE	
Voltage & temperat	ture m	ieasu	irement																				
T16	16	2	DSUB-15		5 Hz	1 Hz		50							0								
T16-TC-K	16	2	Thermo		5 Hz	1 Hz																	
T16-TC-UNI	16	2	Thermo		5 Hz	1 Hz		50															
U16	16	2	DSUB-15		500 Hz	200 Hz		50						0	0								
U16-TC-K	16	2	Thermo		500 Hz	200 Hz																	
Bridge & strain gau	ige me	asur	ements																				
B16	16	4	DSUB-15		500 Hz	200 Hz		5						0									
BC16	16	2	DSUB-26-HD		500 Hz	200 Hz		5															
BCF16	16	4	DSUB-15		500 Hz	200 Hz		5						0									
LVDT16	16	4	DSUB-15		500 Hz	50 Hz																•	
LVDTC16	16	2	DSUB-26-HD		500 Hz	50 Hz																	

imc SPARTAN DIO, counter, DAC modules

	size	connector	nector digital I/O		DAC	pul	se coun	ter
module name SPAR/xxx	slots (1 slot = 4 HP)	standard connector	input Bits	output Bits	analog outputs	counter inputs	quadrature mode chan	counter frequency
Multi functional modules								
DI16-D08-ENC4	2	DSUB-15	16	8		4	2	32 MHz
DI8-D08-ENC4-DAC4	2	DSUB-15	8	8	4	4	2	32 MHz
Digital I/O modules								
DI-16	1	DSUB-15	16					
DO-16	1	DSUB-15		16				
Analog out modules (DAC)								
DAC-8	1	DSUB-15			8			

imc SPARTAN software options

	Features Page 1997	Licen	sing
Software product	Functionality	License model	incl.
Operating software			
imc STUDIO Standard	Operating software, integrated test & measurement suite	PC	C
imc STUDIO Professional / Developer	Customized operation, scripting, application development	PC	
imc CANSAS	In-situ configuration of imc CANSAS modules		
imc SENSORS	Sensor data base	PC	
Real-time data analysis			
imc Online FAMOS	Real-time calculations, immediate results	Device	
imc Online FAMOS Professional	Real-time control extensions, PID control etc.	Device	
imc Online FAMOS Kits	Class counting (fatigue analysis), order tracking	Device	
Post processing			
imc FAMOS Reader	Data visualisation	PC	
imc FAMOS Standard / Professional / Enterprise	Data visualisation, analysis, reporting, scripting	PC	C
Remote access			
imc LINK	Remote device access, automatic data transfer	PC	C
imc REMOTE	Web Server, secure https device access	Device	
CAN			
Vector database	Vector database interface	Device	
ECU protocols	ECU protocol support (KWP 2000, CCP, OBD-2)	Device	
Development			
LabVIEW™ VI's	LabView VI components		

Digital I/O

galvanically isolated, configurable to 24V/5V (TTL/ CMOS) Level, output: 0.7A sink current

Pulse counter

full analog input conditioning: 500 kHz analog bandwidth, differential input, analog filter, software adjustable threshold levels

Modes: event counter, time, frequency, speed, RPM, differential and absolute angle and displacement

TEDS support


(Transducer Electronic Data Sheet) imc SPARTAN support direct read/write of TEDS sensors, including imc's TEDS Clip.

Connectors: TEDS interfaces require either the ACC/ DSUBTEDS-x variants of our connectors


Key: ● Default, ○ Optional


imc C-SERIES

Handy all-in-one Data Acquisition System

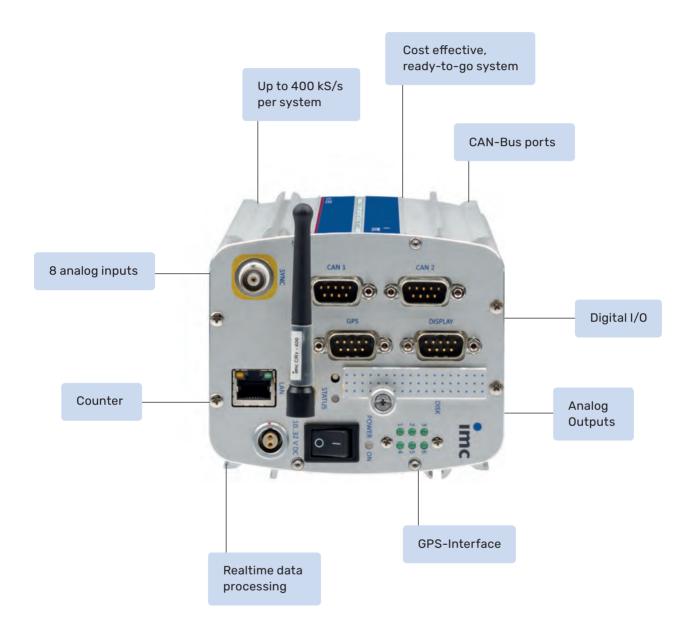

Sized to be **EASILY PORTABLE**, yet surprisingly **VERSATILE**, the imc C-SERIES is also a powerhouse of capability: from the analog inputs with integrated signal conditioning, to the digital I/O, counter inputs, analog outputs and CAN FD interface to the integrated real-time data processing and control platform imc Online FAMOS – everything you need for your test is literally in the palm of your hand!

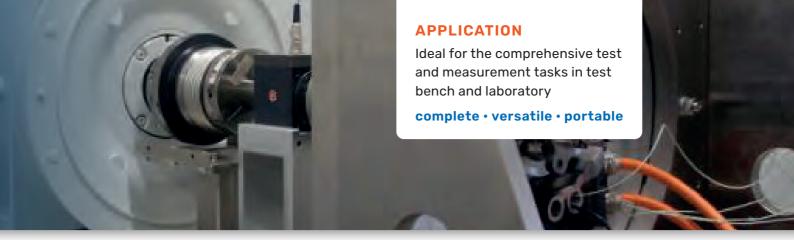

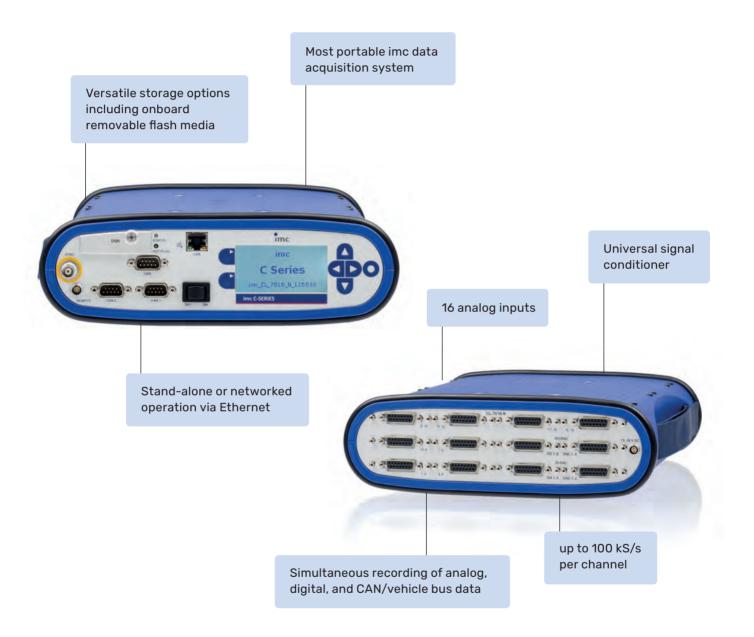

Regardless of where your testing takes you – from the field to the lab – the **ALL-IN-ONE** concept of the imc C-SERIES systems means that you will always have everything you need at your fingertips. And since onboard flash storage gives you the freedom to run interactively or stand-alone, you can easily setup an overnight test and won't have to worry about leaving your laptop behind.

imc C-SERIES Details

imc C-SERIES housing types

		CS	C.
G	eneral		
А	ggregate sampling rate	40	0 kSps
Н	ousing type	alu profile	portable polymer
W	eight	2 kg	3.5 kg
0	perating conditions		
S	tandard operating temp. range	•	•
Е	xtended temp. range (incl. condensation)	0	0
	hock and vibration rating	MIL 8	10F (40g)
	onnectivity		
	thernet	•	•
	LAN (WiFi) internal	0	0
	PS connection port	•	•
	isplay connection port		
	isplay integrated		
	emote controlled main switch		
	ynchronization signal (isolated)	BNC	BNC
	rogrammable status feedback (LEDs)		
	ata storage		
	F card slot (Compact Flash)		
	torage on PC / network drive (NAS)	•	
	SD (internal)		0
	tand-alone capabilities		
	C independent complex trigger functionality		
	nboard real-time data analysis (imc Online FAMOS)		
	utarkic PC-less operation, self start		
	ynchronization & clock		
	laster-Slave between different systems		
	TP network based synchronization		
	ia external GPS signal		
	ia externem IRIG-B & DCF-77 signal		
	ield bus extensions		
	AN (2 nodes) incl. CAN FD (max. 8 MBaud) ulse counter and process control (digital I/O, analog	out)	
		outj	
	bit digital in, 8 bit digital out pulse counter (2 chan quadrature mode)		
	channel analog out (DAC)		
	ower supply		
	C input 10V to 32V		
	C/DC adaptor (110 to 230VAC)		
	ata integrity upon power fail		
	hort-term UPS	Supercaps	NiMH
	utomatic shutdown after power failure	1s	30 s
	solated power supply input	13	0
	oftware		
	nc STUDIO test & measurement software	0	0
in			



imc C-SERIES device models analog channels

size coni	necto	r	speed	volt	age mode	C	urrent	tem	р І	ICP, s	supp	ly _b	ridg	e mo	de				
device name	housing	channels	connectors	max.sampling rate (per channel)	signal bandwidth (-3dB)	isolated voltage mode	min. voltage range (mV)	voltage up to 10V	voltage up to 50/60V	20mA internal shunt	20mA shunt plug	thermocouple (TC)	RTD (PT100)	ICP mode integrated	ICP plug	sensor supply	full bridge	half bridge	quarter bridge
Voltage measurement			(C×-1xxx)																
CS-1016	s	16	DSUB-15	20 kHz	6.6 kHz		250								0	0			
CS-1208	S	8	DSUB-15	100 kHz	48 kHz		5								0	0			
Voltage & temperature measur	emen	t	(C×-41xx)																
CS-4108	S	8	DSUB-15	100 kHz	11 kHz		50								0	0			
CL-4124	L	24	DSUB-15	100 kHz	11 kHz		50								0	0			
Audio & vibration			(C×-30xx)																
CS-3008	S	8	BNC	100 kHz	48 kHz		5		•										
Bridge & strain gauge			(C×-50xx)																
CS-5008	S	8	DSUB-15	100 kHz	5 kHz		5								0				•
CL-5016	L	16	DSUB-15	100 kHz	5 kHz		5								0				•
For universal use			(C×-70xx)																
CS-7008	S	8	DSUB-15	100 kHz	48 kHz		5								0				•
CL-7016	L	16	DSUB-15	100 kHz	48 kHz		5								0				•

imc C-SERIES software options

	Features	Lic	ensing
Software product	Functionality	License model	included
Operating software			
imc STUDIO Standard	Operating software, integrated test & measurement suite	PC	0
imc STUDIO Professional / Developer	Customized operation, scripting, application development	PC	0
imc SENSORS	Sensor data base	PC	0
Real-time data analysis			
imc Online FAMOS	Real-time calculations, "immediate results"	Device	•
imc Online FAMOS Professional	Real-time control extensions, PID control etc.	Device	0
imc Online FAMOS Kits	Class counting (fatigue analysis), order tracking	Device	0
Post processing			
imc FAMOS Reader	Data visualization	PC	•
imc FAMOS Standard / Professional / Enterprise	Data visualization, analysis, reporting, scripting	PC	0
Remote access			
imc LINK	Remote device access, automatic data transfer	PC	0
imc REMOTE	Web Server, secure https device access	Device	0
CAN			
Vector data base	Vector data base	Device	0
ECU protocols	ECU protocol support (KWP 2000, CCP, OBD-2) for CAN interface	Device	0
Development			
LabVIEW™ VI's	LabVIEW VI components		
imc API	.net programming interface	PC	0

TEDS support (Transducer Electronic Data Sheet)

imc C-SERIES supports direct read/ write of TEDS sensors, including imc's TEDS Clip.

Connectors: TEDS interfaces require the ACC/DSUB-TEDS-x variants of our connectors. "IEPE" type TEDS is supported in audio modules with direct BNC input connectors.

Digital I/O

galvanically isolated, configurable to 24V/5V (TTL/CMOS) Level, output: 0.7A sink, high current: sink and source 0.7A

Pulse counter

full analog input conditioning: 500 kHz analog bandwidth, differential input, analog filter, software adjustable threshold levels

Modes: event counter, time, frequency, speed, RPM, differential and absolute angle and displacement

Key: ● standard, ○ optional




DSUB-15 screw terminal plug



Expansion plug for IEPE/ICP

imc EOS

High-Speed Data Acquisition and Transient Recorder

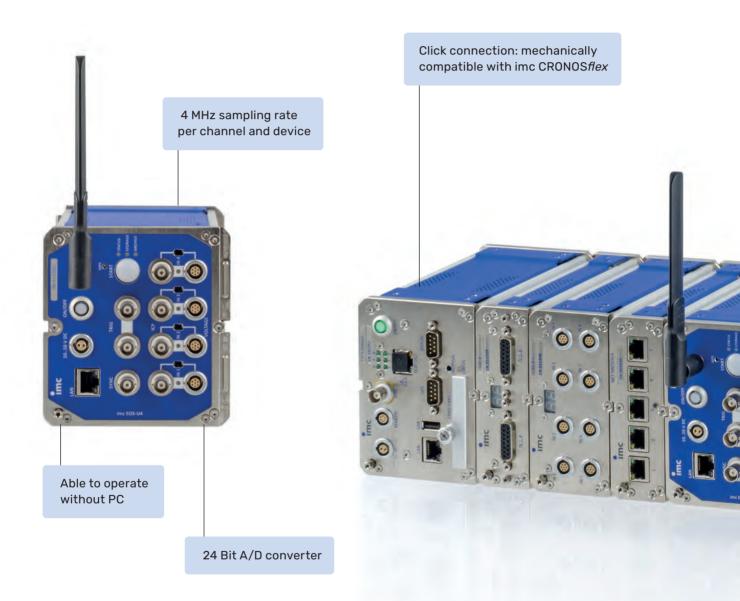

Thanks to **HIGH-SPEED DAQ** technology and versatile measurement inputs, imc EOS enables very fast and precise measurements of voltage, current transducers and IEPE sensors for acceleration, sound or force with up to 4 MHz. imc EOS is thus particularly suitable for the analysis of very dynamic processes in blast tests, material and component testing or vibration analysis.







Wide measurement ranges: galvanically isolated precision measurement amplifiers for signals up to ±100 V

In automotive applications imc EOS is able to analyze fuel injection and ignition processes, acquire data on high-frequency vibration of motors, transmissions and suspension and investigate switching action and highly dynamic actuators. In the field of e-mobility, the system can be used for characterizing inverter-driven e-motors.

imc EOS Details

	imc EOS U-4
General	
System data rate	4 MS/s (1x4 MHz, 2x2 MHz, 4x1 MHz)
Analog inputs	
Analog inputs (BNC/LEMO)	4
Sampling rate per channel	1 kS/s to 4 MS/s
Analog bandwidth	1,8 MHz
Operation modes	Voltage measurement, AC- and DC coupling IEPE sensors (AC with current feed)
Measurement ranges	±100 mV ±60 V (max. 100 V)
Isolation	channel-wise galvanically isolated
Selectable digital filters	200 Hz 500 kHz and Automatic Anti-Aliasing-Filter (digital AAF): max. 800 kHz @ 2 MSps/s
Resolution	24 Bit ADC
Sensor supply (optional)	
Output voltage	±15 V ±2.5 V
Selectable	channel-wise configurable
Isolation	channel-wise galvanically isolated
Output power	1.5 W/channel, overload and short circuit proof
Connectivity	
Ethernet	1 x GBit-LAN (RJ45)
WLAN (optional)	WLAN adapter (802.11 g/n/ac, 300 Mbit/s)
Synchronization	1x BNC (IRIG-B)
External Trigger	2 x BNC (IN/OUT)
Action-Button (manual start, trigger, etc.)	•
Data storage	
Onboard Flash memory	480 or 960 GByte
Storage to PC (network streaming)	•
Arbitrary memory depth with pre- and post-trigger	•
Autonomous operation	
Autarkic operation (without PC)	•
Auto data saving upon power failure	•
Trigger function (PC independent)	•

	imc EOS U-4
Synchronization & clock	
Master-Slave between imc systems	•
Network based synchronization: NTP and PTP (in preparation)	•
via external IRIG-B signal	•
Power supply	
DC supply input 10 to 50 V (isolated)	•
AC/DC adapter (110 to 230 VAC)	•
Data integrity (saving) upon power fail	•
Long term UPS (Li-lon battery)	0
Operating conditions	
Operating temperature range (standard), non-condensating	-10°C to +55°C
Operating temperature range (extended), condensation allowed	-40°C to +85°C (optional)
Shock and vibration	MIL-STD-810 Rail Cargo Vibration Exposure U.S. Highway Truck Vibration Exposure

Suitable Accessories

Key: ● Default, ○ Optional



Active and passive handles

Practical handles for clicked-together module blocks



HANDLE-LI-IO-L

UPS-Solution for imc EOS and imc CRONOS*flex*



NET-SWITCH-5

5-Port GBit-Ethernet-Switch with PPT-Synchronization




SEN-SUPPLY-4

Powerful sensor supply module for current transducers and current clamps


imc BUSDAQflex

Intelligent Multi-Bus Data Logger

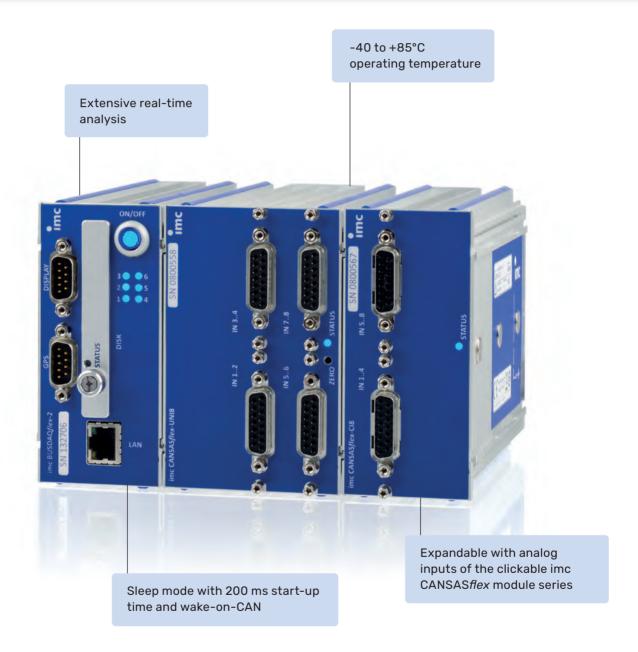

With the imc BUSDAQflex data logger series you can acquire data from all common bus systems of the automotive, railway, aircraft and machine industry. The standard basic configuration of 2 CAN nodes can be extended to 12 nodes for different field and vehicle buses with the larger device variants.



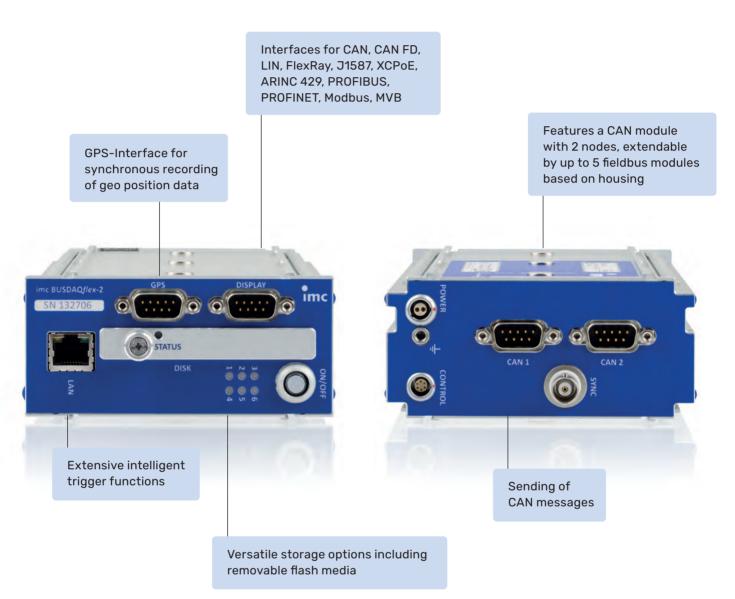

In addition to the acquisition of raw data streams and protocol channels, the **REAL-TIME DECODING** of individual channels as well as complex protocols such as CCP, KWP2000, XCP, OBD2, etc. are supported. The data logger is perfectly complemented by the imc CANSASflex measurement modules.


imc BUSDAQflex Details

General facts & features

	imc BUSLOG <i>flex</i> & imc BUSDAQ <i>flex-2</i> S	imc BUSDAQflex-2	imc BUSDAQ <i>flex</i> -4,-6,-8,-12
Operating conditions			
Operating temperature	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
Shock vibration rating (pk over 5 ms)	50 g	50 g	50 g
Protection rating (with opt. protective cover)	IP40	IP40	IP40
Data storage			
Ring buffer memory	•	•	•
SSD (internal)			0
CF card slot (Compact Flash)	•	•	•
Stand-alone capabilities			
Autarkic PC-less operation, self-start	•	•	•
Sleep/Standby, Wake-up-on-CAN	•	•	
Remote-controllable main switch	•	•	•
Programmable status display (LEDs)		•	9
Synchronization & clock			
Master-slave between different imc systems	•		•
Via external GPS signal, IRIG-B or DCF-77	•	•	•
Via external NTP signal		•	•
Power supply			
DC input	10 - 50 V DC	10 - 50 V DC	10 - 50 V DC
AC/DC adaptor (110 - 230V AC)	•	•	•
Data integrity upon power failure	•	•	•
UPS (Supercaps)	•	•	•
Power consumption in sleep-mode	200 mW	200 mW	200 mW
Connectivity			
Ethernet (100 MBit)	•	•	•
WiFi adapter internal			0
Wireless UMTS, 3G, 4G (external)	0	0	0

^{*1:} only with pure CAN/LIN equipment

Key: ● default, ○ optional

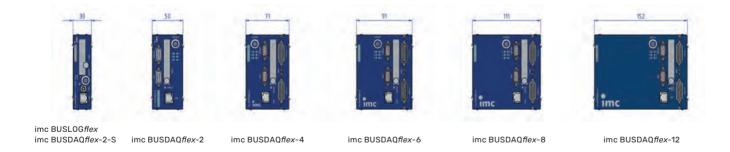

Inputs and outputs

	imc BUSLOG <i>ffex</i> & imc BUSDAQ <i>ffex-</i> 2S	imc BUSDAQffex-2	imc BUSDAQflex -4,-6,-8,-12	
Bus interfaces				
CAN nodes	2	2	2 (max. 12)	
Expandable	no	no	yes	
Supported expansion modules				
CAN			0	
CANFD			0	
LIN			0	
FlexRay			0	
J1587			0	
ARINC			0	
XCPoE (Master, Slave)			0	
MVB			0	
APPMOD (Ethernet/RS232/RS485)			0	
Inputs and outputs				
Digital inputs			4	
Digital outputs			4	
Analog / digital in and outputs (via imc CANSASflex)	0	0	0	
Additional connections				
GPS connection		•	•	
Display connection		•	•	


Software options

Software product	Functionality	License- model	Included
Operating software			
imc STUDIO Standard	Operating software, integrated test &measurement suite	PC	0
imc STUDIO Professional / Developer	Customized operation, scripting, application development	PC	0
Real-time data analysis			
imc Online FAMOS	Real-time calculations, immediate results	device	0
imc Online FAMOS Professional	Real-time control functions, PID controller, etc.	device	0
imc Online FAMOS Kits	Class counting (durability analysis), order tracking	device	0
Post Processing			
imc FAMOS Reader	Data visualization	PC	•
imc FAMOS Standard / Professional / Enterprise	Data visualization, analysis, reporting, scripting	PC	0
Remote Access			
imc LINK	Remote device access, automatic data transfer	PC	0
imc REMOTE	Web Server, secure https device access	device	0
CAN			
Vector database	Vector database interface	device	0
ECU protocols	ECU Protocol support for CAN interface (KWP 2000, CCP, XCP, OBD-2, UDS, GMLAN, TP 2.0, DiagOnCAN)	device	0
Applications development			
LabVIEW™ VI's	LabVIEW VI-components		•
imc API	.NET Programmierschnittstelle (API)	PC	0

^{*2:} not available for imc BUSLOGflex


imc CANSASflex

Intelligent Measurement Modules based on CAN-Bus

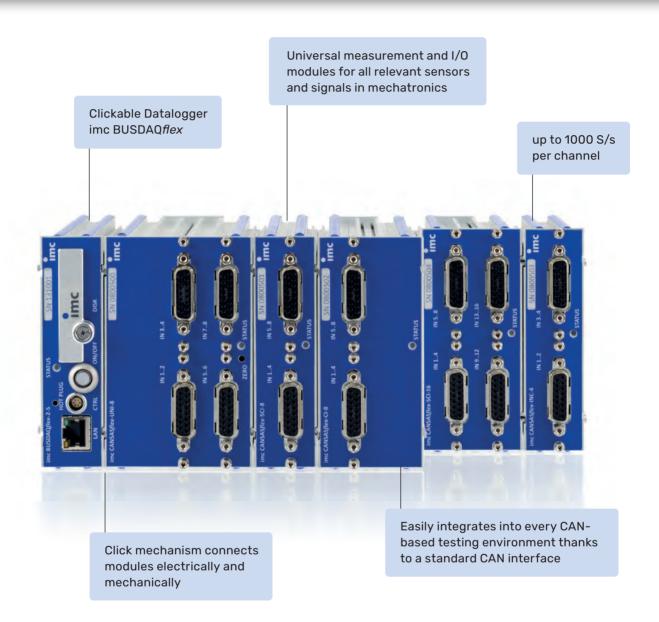

The imc CANSAS flex series offers a wide selection of can-based DAQ modules, which cover all typical sensors and signals from heavy machinery, industrial installations and vehicles. The modules can be **DISTRIBUTED SPATIALLY VIA CAN** cable or clicked together as a central unit. imc CANSAS flex modules are designed to fit into a special 19" subrack solution.



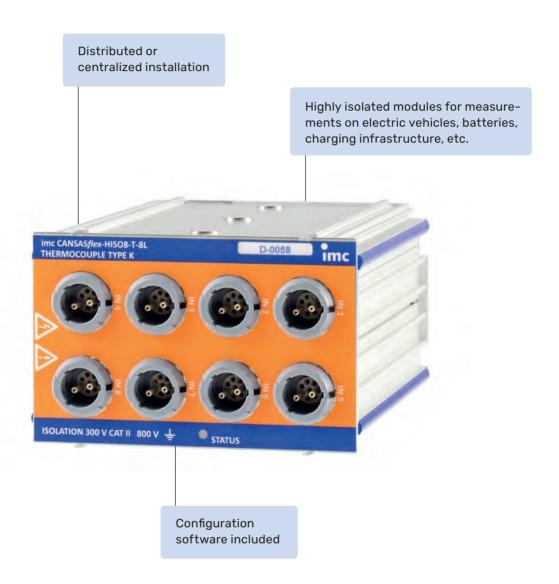

imc CANSASflex offers not only precise and versatile signal conditioning and digitization for CAN based data acquisition but can also deliver immediate results: with virtual channels, calculated directly in the measurement module up to full and comprehensive live analysis with imc Online FAMOS, provided in conjunction with imc CAN loggers such as BUSDAQflex.


imc CANSASfit

Robust Measurement Modules



Measurement modules used for DAQ in mobile testing must be **ROBUST** and **COMPACT** because they are often placed in areas such as the engine compartment where space is limited and temperatures can be high. The imc CANSASfit series works reliably from -40° to +125° C, has a protection rating of IP65 and, due to their small form factor, can be placed almost anywhere.



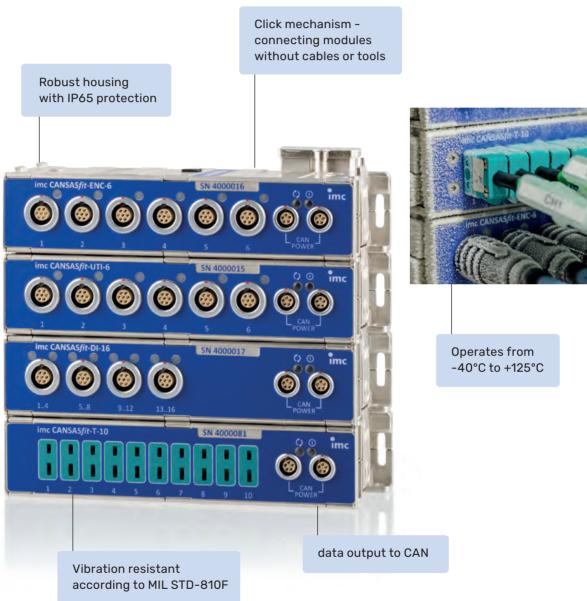

The user can simply click modules together to create blocks. Wiring between the modules is not necessary. The modules allow for direct connection to all typical sensors such as voltage, current, temperature, rpm, displacement and velocity. The digitized signals are output on CAN and can be read or recorded by any datalogger, PC or control system with a CAN interface.

imc CANSAS family Details

General specifications and functions

Function		flex	fit
main features		full flexibility universal, special	vehicle tests, "under the hood"
Application			
mobile testing		**	***
test stand		***	*
laboratory		***	*
mobile machinery		**	***
System			
clickable		•	•
mechanically compatib	le logger	•	0
19" rack	with slot detection	•	
DIN-rail	mounting kit	•	
CAN terminator	internal, switchable	•	
desktop compatible	rubber buffer	•	
Signal processing			
ADC, processing	24 Bit	•	•
CAN messages	16 Bit integer 32 Bit float	•	•
virtual channels	min/max/mean, linearization math, filter, logic	•	
heartbeat	-	•	
CANopen		•	
FindMe		•	
configuration read-bac	k	•	
user status LED	freely programmable	•	
Operating conditions			
high temperature		85°C	125°C
sealed		IP40	IP65
shock & vibration resita	ınt MIL Standard	MIL810	MIL810
DC supply	automotive	1050 V	750 V
	isolated	•	•
Connectors			
I/O connectors	DSUB-15	•	
	LEMO.1B	•	•
	custom (BNC, ITT-Veam)	•	
CAN + supply	combi socket	DSUB-9	LEMO.0B
supply	separate	LEM0.0B.302	
Portfolio			
diversity	module types	***	*
isolation	isolated I/O	**	***
HV modules		•	•
TEDS	plug & measure	•	
temperature		•	•
current, 20 mA		•	•
bridge, strain gauge		•	0
pulse counter		•	•
DI		•	
DO		•	
analog out (DAC, PWM)		•	
RELAIS8		•	
pressure		•	
SENT		•	



Legend: ● standard, ○ optional, (●) limited

★★ ideally suited ★★ well suited ★ suited


Measurement modules: imc CANSASflex / imc CANSASfit

type	s	eries	5	fea	ture	s	cor	nnec	tord	ptic	ns	spe	ed		isolation	v	oltage	curr	ent	t	emp		bri	idge	mod	e	
modul name	imc CANSAS <i>flex</i> (short)	imc CANSASflex (long)	CANFT	channels	TEDS (with DSUB, LEMO)	Sensor Supply	DSUB	ГЕМО	Thermo	ITT-Veam	Banana	"max. sampling rate (per channel)"	signal bandwidth (-3db)	indivdually isolated	Isolation Voltage	min. voltage rate (mV)	max. voltage rate (mV)	20mA internal shunt	20mA shunt plug	thermocouple	PT100	PT1000	full bridge	half bridge	quarter bridge (120 Ohm)	quarter bridge (350 0hm)	
temperature me C8-2T CI8-2T SC16-2T SCI8-2T SCI8-2T SCI16-2T	asure	• • • • • • • • • • • • • • • • • • •		8 8 16 8					•			100 Hz 1000 Hz 1 Hz 2 Hz 1 Hz	20 Hz 440 Hz 0.5 Hz 1 Hz 0.5 Hz	•	60 V 60 V 60 V					• • • •							
voltage and tem	perat		neasu		nt							1112	0.0112		00 1									_			
C8 CIB SC16 SCIB SCI16	•	•		8 8 16 8 16	•	0 0 0 0	• • •	• • •		•		100 Hz 1000 Hz 500 Hz 1000 Hz 500 Hz	20 Hz 440 Hz 28 Hz 42 Hz 23 Hz	•	60 V 60 V	2.5 mV 20 mV 100 mV 100 mV	60 V 10 V 60 V		•	• • •	•						
high isolated vol	tage	and t	empe	ratur	e me	asur	eme	nt																			
HISO8-L HISO8-4L HISO8-T-8L HISO8-T-2L HISO-HV4		•		8 8 8 8				•			•	1000 Hz 1000 Hz 1000 Hz 1000 Hz 1000 Hz	440 Hz 440 Hz 440 Hz	• • •	800 V 800 V 800 V 800 V	20 mV 20 mV	100 V 100 V 800 V 1000 V (trans.)	•		•	•	•					
Bridge & strain g	auge	mea	surem																								
DCB8 Universal use UNI8				4	•	•	•	•		•		1000 Hz 1000 Hz				5 mV		(()	•	•	•		•	•			
Digital & counte						_																					
INC4 DI16 DO16 DO8R DO16R	• • • •			4 16 16 8 16								1000 Hz 10 kHz 11 kHz 12 kHz 13 kHz	500 KHZ														
SENT				8																							
DAC8 PWM8 imc CANSAS	•		los	8			•			•		5 kHz 10 kHz	5 kHz	•													
voltage and tem				rome	nt.																						
T-10 UTI-6	регас	uren	•	10 6		•		•	•			100 Hz 1000 Hz	20 Hz 400 Hz	•	60 V	25 mV	60 V	•		•	•	•					
high isolated vol HISO-T-8-2L HISO-UT-6-3L HISO-HV-4 Digital & counte		and t	empe	8 6 4	e me	asur	eme	nt •			•	100 Hz 1000 Hz 1000 Hz		•	1000 V CAT I 1000 V CAT I 1000 V CAT II	25 mV	100 V 1500 V			•	•	•					
Digital & countel				6				•				1000 Hz	2 MHz	•													
DI-16				16				•				1000 Hz	ZIMI	•													


TEDS Support (Transducer Electronic Data Sheet) imc CANSAS devices support direct read/write of TEDS sensors, including imc's TEDS Clip. TEDS interfaces require either the ACC/DSUB-TEDS-x variants of our connectors (2-wire TEDS), or per-channel connectors such as Lemo or ITT-VEAM.

imc CANSAS-IHR

Wide-range Current Measurement Module

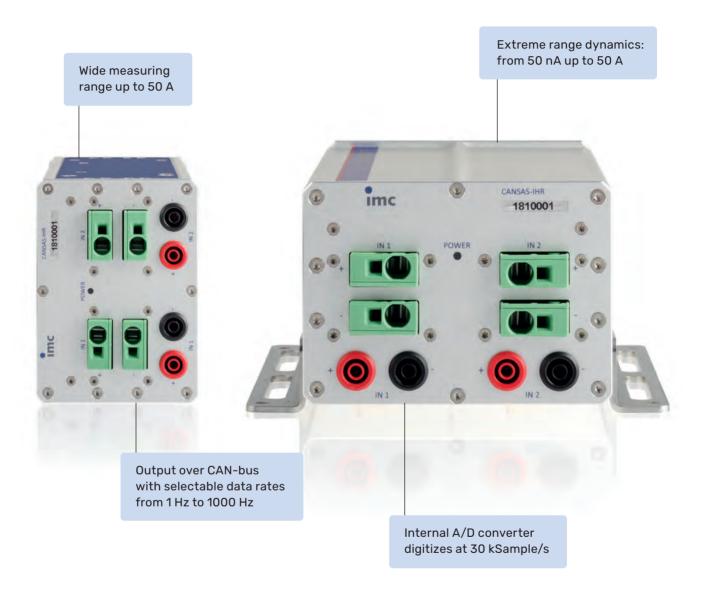


With the imc CANSAS-IHR developers have a unique tool at hand that allows current measurement across a very wide range, When examining quiecent and sleep-mode currents as well as full power loads you can now capture the entire power-up and power-down sequences of electrical components and systems without loosing any details – in one single measurement!



As a rack system for up to 7 plug-in modules with 2 channels



Rack version for laboratory and test stand

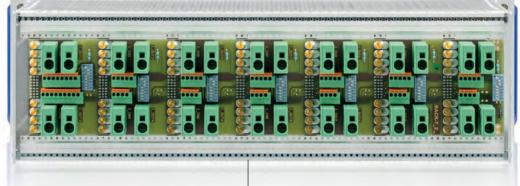


Two autonomous, isolated channels for current measurement with automatic range switching

The CANSAS-IHR high resolution measurement module applies autoranging by shunt switching, Sophisticated yet plug&play technology supports this high range dynamics in an interruption-free measurement! Capture currents that vary from 50nA to 50A in a single continuous acquisition without interrupting the current path!

imc STUDIO

Integrated Software for the Entire Testing Process


CONFIGURE AND MEASURE

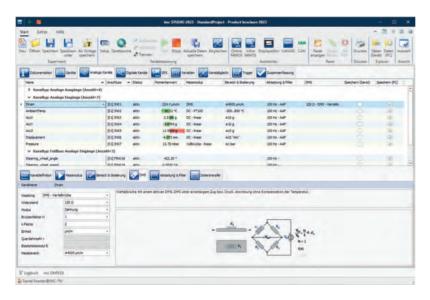


DISPLAY AND OPERATE



RECORDING OF VIDEO

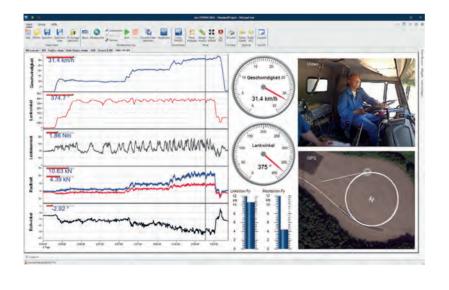


AUTOMATE TEST STANDS




imc STUDIO is a **MODULAR TEST AND MEASUREMENT SOFTWARE** that combines many separate tools in one seamless and integrated environment. Within this framework, users are able to quickly perform measurements, **ANALYZE** data in real-time and create sophisticated tests.





CREATE TEST SEQUENCES



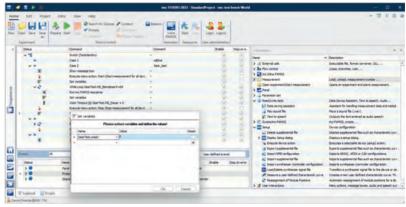

REAL-TIME ANALYSIS



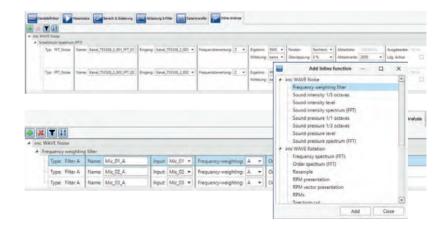



With just a few mouse clicks, you can **SETUP** you DAQ system, **DESIGN** your own screens (Panels), **AUTOMATE** test sequences using drag & drop, **RECORD** GoPro videos and create real-time automation and **CONTROL** for your test bench without programming a single line of code.

imc FAMOS


Software for Data Analysis

IMPORT & EXPORT DATA

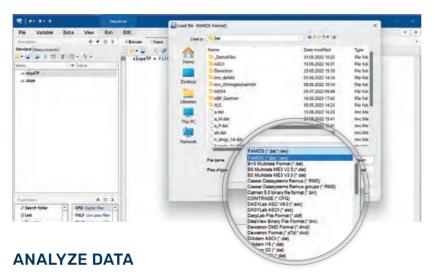


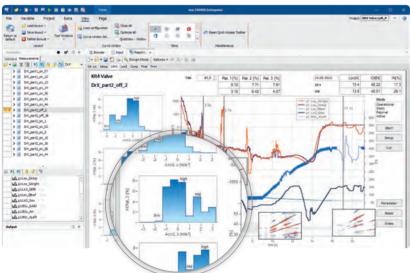

VIEW DATA




AUTOMATE




The **ANALYSIS SOFTWARE** imc FAMOS provides engineers with the versatile tools necessary to visualize and analyze their data, automating routines and complex tasks – from data import to test report. No matter from where your data originates – besides the imc data format, many other data formats are supported and import converetrs can even be easily customized by the user.




COMPARE DATA




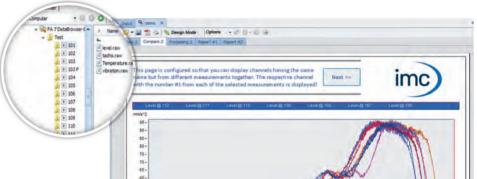

DOCUMENT








Specifically designed for analyzing test and measurement data, imc FAMOS is ideal for engineers and technicians who wish to solve their analysis tasks more efficiently. With a vast number of analysis functions and powerful automation capabilities, imc FAMOS provides quick results. And with the imc FAMOS Reader, you can quickly and easily view data on every PC, for free.

imc WAVE

Software for Sound & Vibration Measurement & NVH Analysis


imc WAVE noise

Measuring sound power and sound pressure

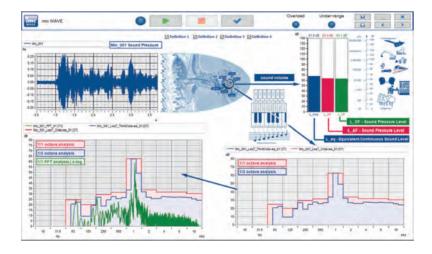

imc WAVE vibration

Vibration analysis for machine diagnosis & human vibration

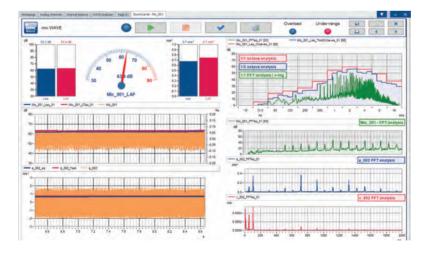


imc WAVE is a modular and powerful software platform for **SOUND AND VIBRATION MEASUREMENT** and **NVH ANALYSIS**. With its analyzers you can evaluate a wide range of applications without having to be an expert yourself: From acoustic measurements in road tests to structural analyses on the test bench and vibration tests on machines.



imc WAVE rotation

Order analysis on rotating machines

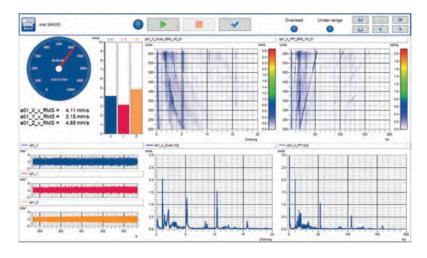

imc WAVE structure

Structural analysis by impact hammer measurements



The imc WAVE analyzers provide you with **STANDARD-COMPLIANT ANALYSIS** from the fields of sound pressure and sound power analysis, structure analysis as well as vibration analysis on non-rotating and rotating machines. imc WAVE guides you step by step through the settings, from configuration to calibration and measurement. At the end, you receive a professional, print-ready report.

imc Telemetry Solutions

Digital Telemetry Systems from Single- to Multi-Channel

TEL1-PCM

12 bit single channel telemetry for strain gauge or thermocouple type K measurement



T1

16 bit single channel telemetry for strain gauge or PT100 temperature measurement



TEL1-PCM-FLEX

Bendable single channel telemetry for strain gauge measurement




The TEL1-FLEX is a compact telemetry designed for tight spaces, featuring thin and flexible transmitter electronics for torque measurements in narrow installations. Its pliable film substrate enables effortless application on rotating shafts or machine components.



For **MEASUREMENTS ON ROTATING COMPONENTS** and moving machinery, imc offers modern telemetry systems for a wide variety of tasks: whether single-channel torque monitoring of a rotating shaft, multichannel strain gauge and temperature measurements on a train wheelset or mechanical power measurement on a vehicle drivetrain in harsh environments. There are telemetry modules available for a large variety of sensors, such as strain gauge, thermocouples, PT100/1000, as well as IEPE sensors and voltage signals. The telemetry systems are characterized by their robust and compact design, digital and interference proof data transmission and their clever supply and installation options.




D* - Universal telemetry for up to 24 channels

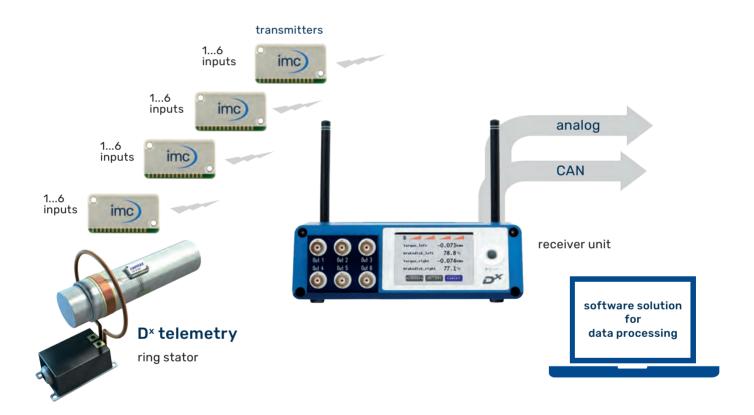

D* telemetry is a compact and lightweight MULTI-CHANNEL TELEMETRY SYSTEM that enables flexible wireless measurements with varying numbers of channels and sensor assignments. The 14 g transmitter unit supports up to 6 channels and different sensor types, including voltage signals up to +/- 22.5 V, thermocouples and strain gauges in half-bridge and full-bridge circuits. The receiver unit synchronously acquires data via radio transmission from up to 4 transmitter modules, allowing for the simultaneous acquisition and transmission of UP TO 24 CHANNELS. Outputs include CAN, and analog interfaces, with easy configuration via Ethernet and a standard web browser.

imc Modular Telemetry

Modular Telemetry MTP-NT

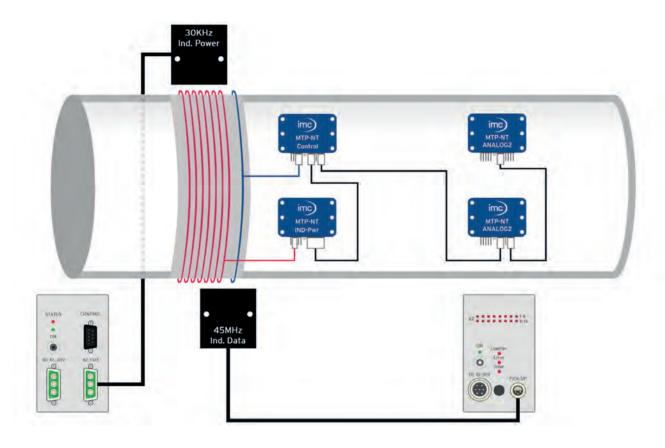








MTP-NT telemetry is a small and **FLEXIBLE TELEMETRY** system that has a modular design. It consists of freely selectable sensor modules, a controller module and an inductive transmitter unit. Depending on the needs of the user, the telemetry system can be freely assembled and subsequently adapted.

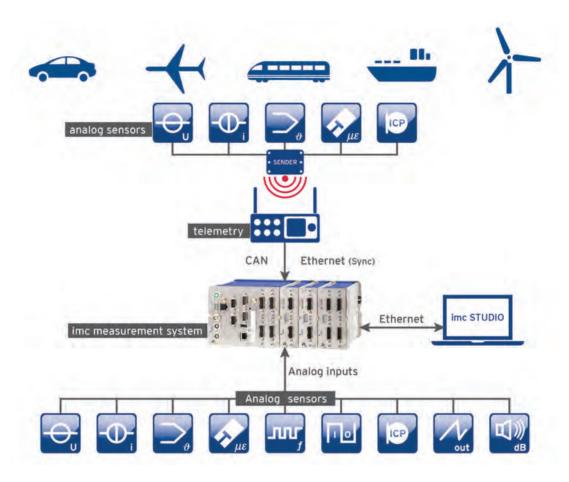

Variant for Rotor and Propeller Applications

The CTP-NT-ROTATE telemetry system enables the acquisition and transmission of 8, 16, 32 or 64 parallel measurement signals from helicopter rotors or aircraft propellers. The integrated battery unit eliminates the need for an external power supply and simplifies installation. The radio telemetry enables data transmission over distances of up to 20 metres in free field. The weatherproof housing (IP65) is designed for outdoor use.

imc Telemetry Solutions Details

		T1	TEL1	TEL1-FLEX
application		one channel	one channel	one channel
distinction		economical	economical	flexible
max. channels per tr	ansmitter	1	1	1
max. channels per de	ecoder / system	1	1	1
technology				
data transfer		inductive	inductive	inductive
reach		35 mm	35 mm	35 mm
resolution		16 bit	12 bit	12 bit
power supply				
inductive		•	•	•
battery				
DC supply voltage				
output (decoder)	data acquisition with imc			
analog +/- 10V	via voltage input	•	•	•
CAN	via CAN interface			
Ethernet	via TELDEC interface			
configuration (para	meterization)			
Ethernet				
USB/RS232				
data rate per transı	mitter			
max. signal bandwid	th	1.2 kHz	1.2 kHz	1.2 kHz
max. sampling rate		6.4 kHz	7 kHz	7 kHz
max. data rate				
measured quantitie	s and sensors			
voltage		•	•	
IEPE				
strain gauge bridges		full / half	full / half	full / half
thermocouple			•	
PT100/PT1000		•		
operating condition	ns			
transmitter		-40 +85 °C	-40 +85 °C	-40 +85 (125) °C
receiver		-20 +70 °C	-20 +70 °C	-20 +70 °C

		D ^x	D ^x - HT	MTP-NT	CTP-NT-Rotate
application		multi-c	channel	multi-channel	multi-channel
distinction		mod	lular	modular	mobile & rotating
max. channels pe	er transmitter	4-	+2	2/4	8, 16, 32, 64
max. channels p	er decoder / system	20,	/24	256	64
technology					
data transfer		ra	dio	inductive / radio	radio
reach		10	m	50 mm	20 m
resolution		16	bit	16 (18) bit	16 bit
power supply					
inductive				•	
battery				•	•
DC supply voltag	je	7 - 39	V DC	12 - 50 V DC	
output (decoder)	data acquisition with imc				
analog +/- 10V	via voltage input			•	•
CAN	via CAN interface				
Ethernet	via TELDEC interface			•	•
configuration (p	parameterization)				
Ethernet					•
USB/RS232				•	
data rate per tra	ansmitter				
max. signal band	lwidth	920 Hz	1 kHz	24 kHz	24 kHz
max. sampling ra	ate	4.6 kHz	5 kHz	100 kHz	62.5 kHz
max. data rate				10 Mbit/s	5 Mbit/s
measured quan	tities and sensors				
voltage				•	•
IEPE				•	•
strain gauge brid	dges	full /	half	full / half/ quarter	full / half/ quarter
thermocouple				•	•
PT100/PT1000		()	●/●	●/●
operating condi	itions				
transmitter		-40 +85 °C	-40 +125 °C	-40 +85 (125) °C	-40 +70 °C
receiver		-20 +65 °C	-20 +65 °C	-20 +70 °C	-20 +70 °C

Legend: • standard, O optional

Automotive Sensor Solutions

Enhancing Precision and Efficiency

Dx-BrakeTemp

Measuring Temperatures on the Brake Disc



D^x-Speed

Wireless Wheel Speed Acquisition



D^x-Power

Mechanical Power Measurements on Shafts



When it comes to comprehensive solutions, our commitment goes far beyond data acquisition hardware and software. Welcome to imc's innovative sensor solutions designed for a wide range of automotive applications. Whether you're engaged in vehicle dynamics tests, brake testing, or road load data acquisition, our portfolio includes a range of high-quality sensor solutions.



WFT-C^x
Robust Wheel Force
Transducers



WTT-D*
Wireless Wheel Torque
Transducer



CLS^x
High-Precision Steering
Effort Sensor



imc's sensors are specifically designed to simplify your work, from easy mounting and calibration to wireless data transmission to maximize your efficiency. Seamless integration with our DAQ platforms means you no longer have to worry about data synchronization and formats. Our sensors redefine excellence by optimizing your processes with every measurement.

Dx-BrakeTemp

Measuring Temperatures on the Brake Disc



The D^x-BrakeTemp is a high-precision tool for measuring temperatures on the wheels of road vehicles. All measurement signals, such as the temperatures at the brake disc, are **DIGITIZED DIRECTLY AT THE WHEELS** and transmitted telemetrically via vehicle mirror antennas to the receiver unit inside the vehicle. With its robust design, the system is also well-suited for harsh environments and road driving.

D*-BrakeTemp Details

Accuracy	±1 K
Temperature range	-40 °C to 60 °C
Sensor inputs	3 or 6 thermocouples type J or K per wheel
Sampling rate	Up to 200Hz per channel with 3 channels per wheel
Measurement range	Typ K: to 1300 °C Typ J: to 1200 °C
Resolution	16 bit
Dimensions	Height: 50 mm Diameter: 100 mm
Mounting on the wheel	Collets on the wheel bolts
Power Supply	Rechargeable battery (up to 80 h)

Wireless Wheel Speed Acquisition without reference point




The D*-Speed system conveniently acquires the wheel speed directly on vehicle wheels. The system does not require a stator or additional reference point and delivers measurement results – both on the test bench and outdoors – even in **HARSH CONDITIONS** such as mud, snow and dust. The accouracy ist typically better than 0.5%. Impacts against the axle also will not affect the results. This means that even driving on rough roads is possible!

Dx-Speed Details

Maximum RPM	±7200 1/min	
Accuracy	< 0.5 % at 10 °C to 50 °C	
Temperature range	-40 °C to 60 °C	
Weight	400 g	
Dimensions	Height: 36 mm Diameter: 140 mm	
Mounting on the wheel	Collets on the wheel bolts	
Power Supply	Rechargeable battery (up to 80 h)	

Mechanical power measurements

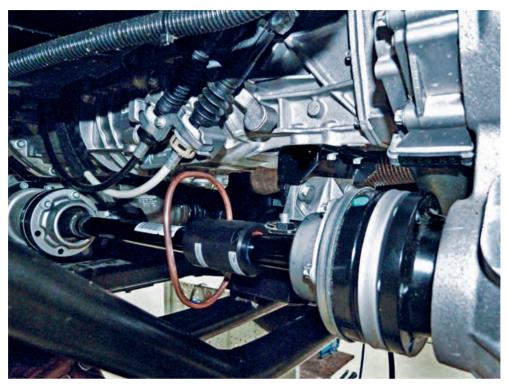

D^x-Power in operation with ring stator for inductive supply

The D x -Power system allows making mechanical power measurements as easy as child's play. The transmitter unit (D x -SCT) is **MOUNTED DIRECTLY ON THE VEHICLE AXLE** by means of a half-shell housing. There it acquires the torque (via strain gauges) as well as the speed via an integrated rpm sensor. The measured data is transmitted telemetrically to the D x -receiver unit (RCI) inside the vehicle. This receiver unit calculates the synchronous values of the two signals in real time according to the formula, power = torque x rpm, and displays all values as physical variables.

D*-Power Details

Maximum RPM	±7200 1/min
Accuracy	< 0.5 % at 10 °C to 50 °C
Temperature range	-40 °C to 85 °C (105 °C)
Torque measurement	Strain gauge
Power Supply	Rechargeable battery or inductive

Services for Telemetry & Sensors

Automotive Sensor Services



imc offers comprehensive services around its telemetry and sensor systems. We support you with the set-up of measurements, help with short processing times for calibrations and provide practical training. In addition, we offer our customers our in-depth know-how even in challenging applications.

You need a wheel force transducer, but only for a short period of time? Or do you simply want to get to know the WFT-C^x and experience its capabilities in practice? imc can provide you a **RENTAL OPPORTUNITY** for the appropriate device. In addition, our specialists will be happy to assist you if required.



Calibration


imc calibrates each WFT-C* on its own specifically developed test bench. Each force and torque is measured separately. Interactions (crosstalk) between the measured variables can thus be detected and compensated for. This results in an unprecedented precision of the measured values (crosstalk, non-linearity, hysteresis: all below 0.2%).

WFT-CX Wheel Force Transducer

saves time: 1 h set-up time for four wheels no re-calibration necessary after assembly Angular resolution 0.072° operates in all weathers and performs all off-road testing Precise over a wide temperature range, even at high temperatures as with brake testing Crosstalk, hysteresis, non-linearity < 0.2 %

Whether vehicle dynamic tests, brake tests or determination of load spectra - the 6-component **WHEEL FORCE TRANSDUCER** WFT- C^{\times} acquires all forces and torques acting on the vehicle with high precision. The robust housing reliably protects against dirt, water and snow and allows applications in any weather.



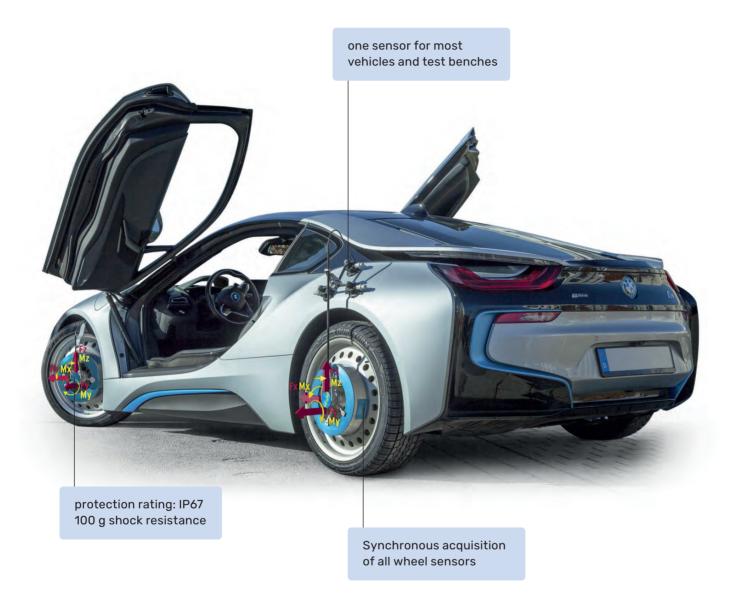


With the flexible adapter system, the WFT-C $^{\times}$ can be used with minimal effort on a variety of vehicle types - **FROM COMPACT CARS TO SUVS** and light trucks - even on the test bench. A quick system setup and convenient software functions, such as zero calibration, allow the system to be test-ready within a very short time

WFT-CX Wheel Force Transducer



Our Wheel Force Transducers are built to withstand challenging environmental conditions. With a wide temperature range of -40°C to +105°C and a waterproof design, they excel in adverse weather conditions, including ice, snow, and meltwater. The robust construction and impact resistance of up to 100 g make them ideal for testing on rough terrains.

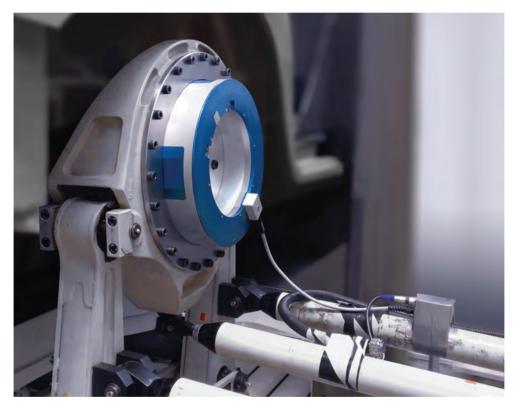

A WFT for component lifetime **TESTING ON THE TEST STAND** must be durable. Especially for these applications, imc offers WFT sensors made of titanium or steel. If a rotating measurement is carried out on a chassis dyno or on a road test, the wired signal transmission to the control unit is simply replaced by a stator. Since all of the WFT sensor housing types have the same dimensions, existing adapters can be used for all types.



WFT-C^x wheel force transducer

Parameter	Value						
		WFT-C ^{xs}					
Material	Aluminium	Titanium	Steel PH17-4	Aluminium			
Measurement principle	te	mperature compensated	strain gauge application				
Measurement range: forces	Fx, Fz = ± 45 kN Fy = ± 25 kN						
Measurement range: torques	Mx, My, Mz = ± 8,75 kNm	Mx, My, Mz = ± 10 kNm	Mx, My, Mz = ± 10 kNm	Mx, My, Mz = ± 6 kNm			
Protection rating		IP66, II	P67				
Sampling rate per channel		up to 5	kHz				
Angular resolution with 5000 increments		0,072	2 °				
Linearity		< 0.2 %	FS				
Hysteresis		< 0.2 %	FS				
Crosstalk	< 0.2 % FS						
Low pass filter	6-pol Butterworth filter, cut-off frequency 1200 Hz						
Weight without adapter (ca.)	7.5 kg	10.5 kg	17.5 kg	5.9 kg			
Rim diameter		min. 14" (356 mm), 1	13" upon request				
Hub diameter with adapter		max. 5	5.5"				
Operating temperature sensor		- 40 °C to	+ 150 °C				
Operating temperature electronics		- 40 °C to -	+ 105 °C				
Mechanical load		Stress analysis according	ng to BMW QV 36026				
Shock proof		max. 10	00 g				
Rotational speed		3000 r	pm				
Safety		mechanical break	age protection				
Dimensions:							
- Outer diameter (w/o adapter)	317.5 mm						
- Inner diameter (w/o adapter)	203 mm						
- Height	76 mm 61.5 mm						
Temperature drift		0.005 %	5 / °C				
Mounting bolts		32 Pie	ces				
Adaption	customer-specific adaption for any vehicle possible						


Synchronized Data Acquisition with imc CRONOS flex

Facilitate seamless data aquisition from two WFT-C* wheel force transducers through the WFT-2 Module. It is simply clicked on an imc CRONOSflex system and is automatically synchronized with all other connected sensors, field buses, GPS systems, etc. Configuration, calibration and zeroing is effortless with the imc STUDIO software. A CRONOSflex supports up to three WFT-2 modules, accommodating a total of six wheel force transducers. This modular setup provides a compact, comprehensive solution for diverse vehicle applications.



WTT-D*

Wheel Torque Transducer

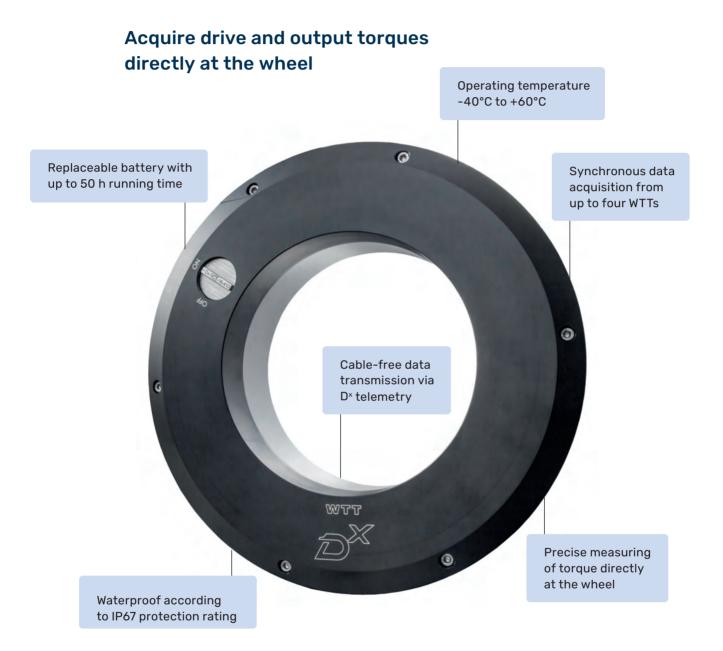

In automotive development, it is important to know the **EXACT TORQUES** acting on the vehicle – especially under acceleration and braking maneuvers. With the WTT-D^x wheel torque transducer, a high-precision tool is available for making such measurements. The WTT detects the mechanical load directly where it is produced: the wheels that form the interface between the vehicle and the road.




$\textbf{WTT-D}^{\mathsf{x}} \ \textbf{wheel torque transducer Details}$

Parameter	Value
Measurement value	torque in axial direction My
Signal transmission	digital-telemetric
Measurement range	My = ±6000 Nm, optional, My = ±3000 Nm
Bandwidth	max. 1 kHz
Linearity	< 0.5 %
Hysteresis	< 0.5 %
Crosstalk	< 0.5 %
Sensor diameter	300 mm
Sensor weight	ca. 4.75 kg (incl. telemetry unit) ca. 6.3 kg (with battery)
Sensor housing material	aluminum
Mechanical load	stress analysis according to AK-LH-08 4.34
Rim diameter	min. 13"
Hub diameter with adapter	max. 6 "
Operating temperature	-40°C to 60°C
Rotational speed	2500 rpm
Shock proof	100 g
Protection rating	IP67 (waterproof)
Mounting and balancing	Yes (wheel bolts accessible)
Power supply	Up to 50 h
Interfaces	Analog and CAN

CLS^x steering effort sensor

High-Precision Steering Effort Sensor

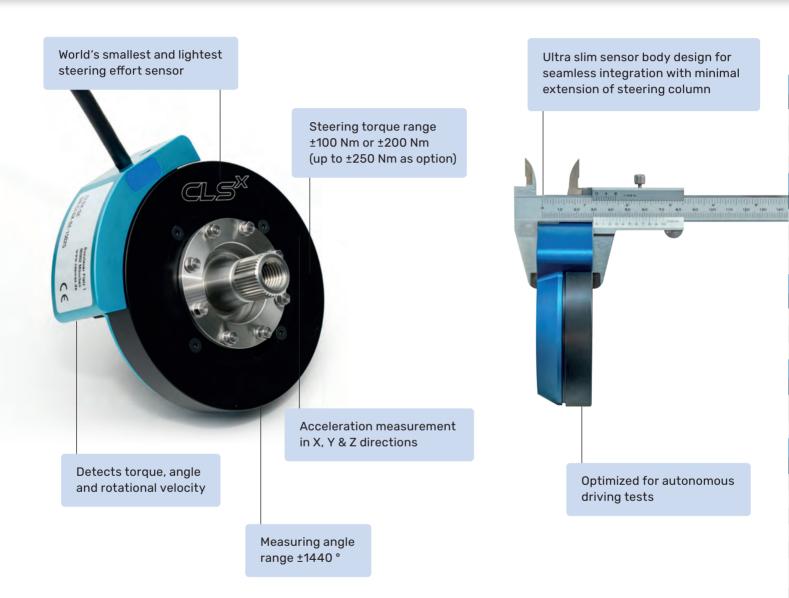

With the innovative CLS* steering effort sensor, the original steering wheel of your vehicle becomes a high-precision instrument that measures steering torque, angle, steering velocity and acceleration in x, y and z directions. The **ULTRA-SLIM SENSOR** can be placed between the steering column and steering wheel in just a few simple steps. High-resolution A/D converters with 24 bits ensure especially good signal quality and noise-free results even at small torques below 3 Nm. This is particularly important when testing advanced driver assistance systems and autonomous driving to determine the overpressure torque.



CLS^x Details

Steering torque						
Parameter	Value	Remarks				
Measuring principle	temperature compensated strain gauge application					
Measurement range	±100 Nm, ±200 Nm, ±250 Nm	others upon request				
Accuracy	0.1% FS	Combined (gain error and non-linearity)				
Bandwidth	0 to 800 Hz	sampling rate 5 kHz				
Steering angle						
Parameter	Value	Remarks				
Measuring principle	incremental angle encoder					
Measurement range	±1440 °					
Accuracy	0.045 °					
Bandwidth	0 to 800 Hz	sampling rate 5 kHz				
Steering velocity (angular velo	ocity)					
Parameter	Value	Remarks				
Measuring principle	calculated from angle					
Measurement range	±2048 °/s					
Bandwidth	0 to 800 Hz	sampling rate 5 kHz				
Vibration and acceleration						
Parameter	Value	Remarks				
Vibration	in the center of the steering column, measurement range up to 5 g in x, y and z direction					
Rotational acceleration	measurement range ±10000 °/s²					
General data						
Parameter	Value	Remarks				
Sensor height	approx. 30 mm	without adapter				
Sensor weight	approx. 0.6 kg	without adapter				
Overload	>100% of the measurement range					
Mech. breaking torque	>500 Nm					
Adaption	special adaption sets for any car or truck manufacturer available					
Moment of inertia Sensor Steering wheel or column adapter	approx. 3000 g cm² typ. approx. 500 g cm²					
Working temperature	-20°C to +80°C					
Control unit						
Parameter	Value	Remarks				
Supply	9 to 36 V DC					
CAN output	freely configurable					
Analog output	freely configurable, max. ±10 V					
Auto zero	Via remote control or push-button for torque and angle on the control unit					



imc SERVICES

From Experts for Experts

CONSULTING & TRAINING

With our global team of measurement experts, we support you in all phases of your testing tasks with consulting and training.

MEASURING SERVICE

For occasional tests, it is often not worthwhile to purchase your own test equipment. For this purpose, we offer contract measurements as a service.





As a **SOLUTION PROVIDER**, imc provides an additional range of services. These include project consulting, contract measurements, data evaluation, outsourcing of specialists and customer-specific software development through to system integration and test bench automation.




SOFTWARE DEVELOPMENT

We develop tailor-made software for you - whether customer-specific analyses, connecting databases, integrating third-party devices or complex test bench controls.

TEST STANDS

We develop customized test benches for research, development and production - whether for component testing, quality assurance or life cycle testing.

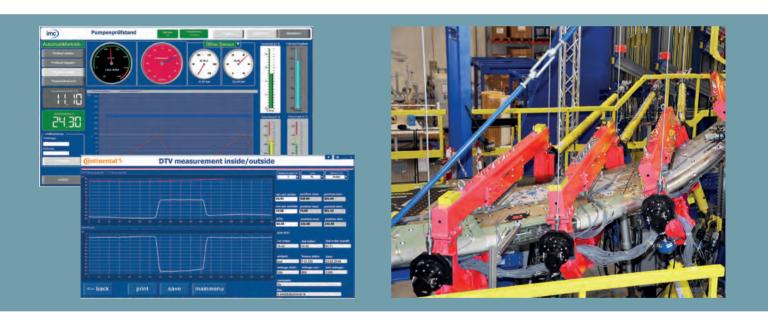

Our **GLOBAL TEAM OF ENGINEERS** is dedicated to working with you throughout all phases of project development - including planning, construction, configuration, and implementation. By our extensive project experience and a high level of competence in solving test and measurement tasks, we want users to reach their testing goals faster and more efficiently.

About imc Test & Measurement

imc Test & Measurement GmbH is a manufacturer and solution provider of productive test and measurement systems. Together with its customers from the fields of automotive engineering, mechanical engineering, railway, aerospace and energy, imc implements metrological solutions for research, development, service and production.

Our customers use imc measurement devices, software solutions and test stands to validate prototypes, optimize products, monitor processes and gain insights from measurement data.

imc Test & Measurement is part of Axiometrix Solutions, a leading test solutions provider comprised of globally-recognized measurement brands like GRAS Sound & Vibration and Audio Precision.

Contact us:

imc Test & Measurement GmbH Voltastraße 5 D-13355 Berlin Germany

www.imc-tm.com

