

AMB/2HR.1000C Biaxial MEMS High Resolution DC Response Accelerometer ±2g range, 1000mV/g sensitivity




The AMB range of accelerometers are Biaxial MEMS (micro electro mechanical system) DC response voltage output devices for testing at low frequency vibration measurement from DC (0Hz) and above. They are Biaxial (measuring in 2 directions simultaneously) variable capacitance design. The AMB/2HR.1000C has a 4 pin ¹/₄-28UNF side entry connector.

Ideally suited to low frequency vibration applications including low level vibration where high sensitivity is required.

Due to their ability to measure DC response they can also be used to measure constant gravity application.

The AMB/2HR.1000C has a range of $\pm 2g$ and a sensitivity of 1000mV/g, we recommend using with DJB's MEMS signal conditioner the DCM-03

AMB/2HR.1000C

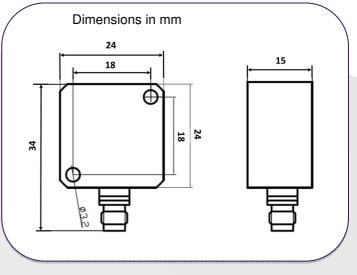


Features:

- Operational frequency range DC to 200Hz
- 1/4-28UNF 4 pin connector
- DJB signal conditioner model DCM-03 available as an option
- Differential Capacitance operation
- Compact form and low mass
- Constant gravity measurement

Applications:

- Auto/Aero structural body surveys
- Constant gravity measurements
- General vibration measurement
- Seismic vibration measurement
- Crash testing

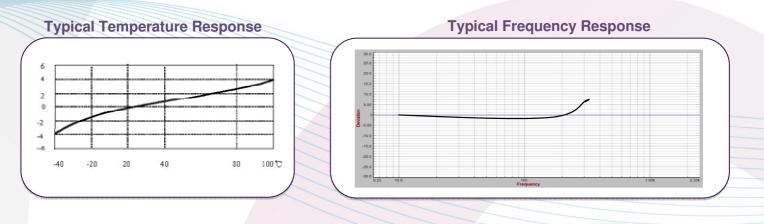

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes.

DJB Instruments (UK) Ltd Finchley Avenue, Mildenhall, Suffolk IP28 7BG Tel+44 (0)1638 712 288Emailsales@djbinstruments.comWebwww.djbinstruments.com

om DIB Is



A UK company with UK-based manufacturing, assembly and calibration in-house.

DJB Iss.4.2021

ISO 9001 - 00025363



AMB/2HR.1000C Biaxial MEMS High Resolution DC Response Accelerometer ±2g range, 1000mV/g sensitivity



| | Metric | Imperial |
|--------------------------------|----------------------------------|--------------------------|
| Sensitivity (20°C) | 100.97mV/(m/s ²)±10% | 1000mV/g±10% |
| Measurement Range | ±19.6m/s² pk | ±2g pk |
| Transverse sensitivitv | ≤5% | |
| Frequency Range (±5%) | DC to 150 Hz | |
| Frequency Range (±10%) | DC to 200Hz | |
| Mounted Resonance Frequency | 5,000 Hz | |
| Temperature Range | -40 to +120°C | -40 to +248°F |
| Temperature Sensitivity | 0.1 mV/°C | |
| Shock limit (No Supply) | 29,420m/s ² | ±3,000g |
| Power Supply | +6 to +30 VDC | |
| Operating Current | ≤5mA | |
| Offset Voltage | 2.5±0.1VDC | |
| Noise(100Hz) | < 0.14mVrms | |
| Resolution | 0.3mg (rms) | |
| Weight | 18grams | 0.63oz |
| Case material | Titanium | |
| Case sealing | Hermetic | |
| Mounting | 2 x Ø3.2mm hole | 2 x Ø0.12inch holes |
| Connector Exit | Side | |
| Size | 24 x 24 x 15mm | 0.94x 0.94 x 0.59 inches |
| IP rating | IP65 | |

Options:

- DCM-03 3 channel MEMS signal conditioning unit.
- Pigtail cable terminations

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes.

DJB Instruments (UK) Ltd Finchley Avenue, Mildenhall, Suffolk IP28 7BG Tel+44 (0)1638 712 288Emailsales@djbinstruments.comWebwww.djbinstruments.com

DJB Iss.4.2021



A UK company with UK-based manufacturing, assembly and calibration in-house.

ISO 9001 - 00025363