

## High Temperature Miniature Pressure Sensor



### Features

- ➔ Available with 0,5-4,5Vdc output
- ➔ Miniature pressure sensor
- ➔ Operating from -40 to +175°C
- ➔ Large Bandwidth

### Applications

- ➔ Oil & gas
- ➔ Aerospace
- ➔ Military
- ➔ Test benches

Operating from -40 up to +175°C, the PHT160 series is dedicated to high temperature pressure measurements. With all stainless steel wetted parts, it is compatible with most media, including corrosive fluids used in automotive, aerospace and energy industries. Equipped with the premium thin film technology developed by EFE, its performances and stability over wide temperature range are excellent. The PHT160 is available with unamplified output (mV/V), compensated in temperature to deliver the best accuracy. Amplified output (Vdc) is also standard, thanks to a high performance and ruggedized built-in electronic module.

## Technical specifications

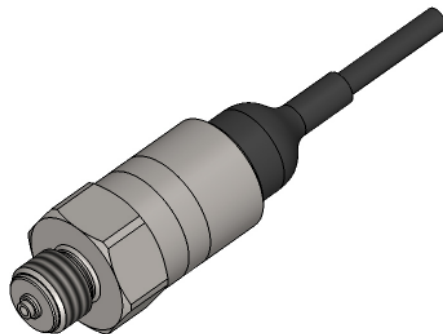
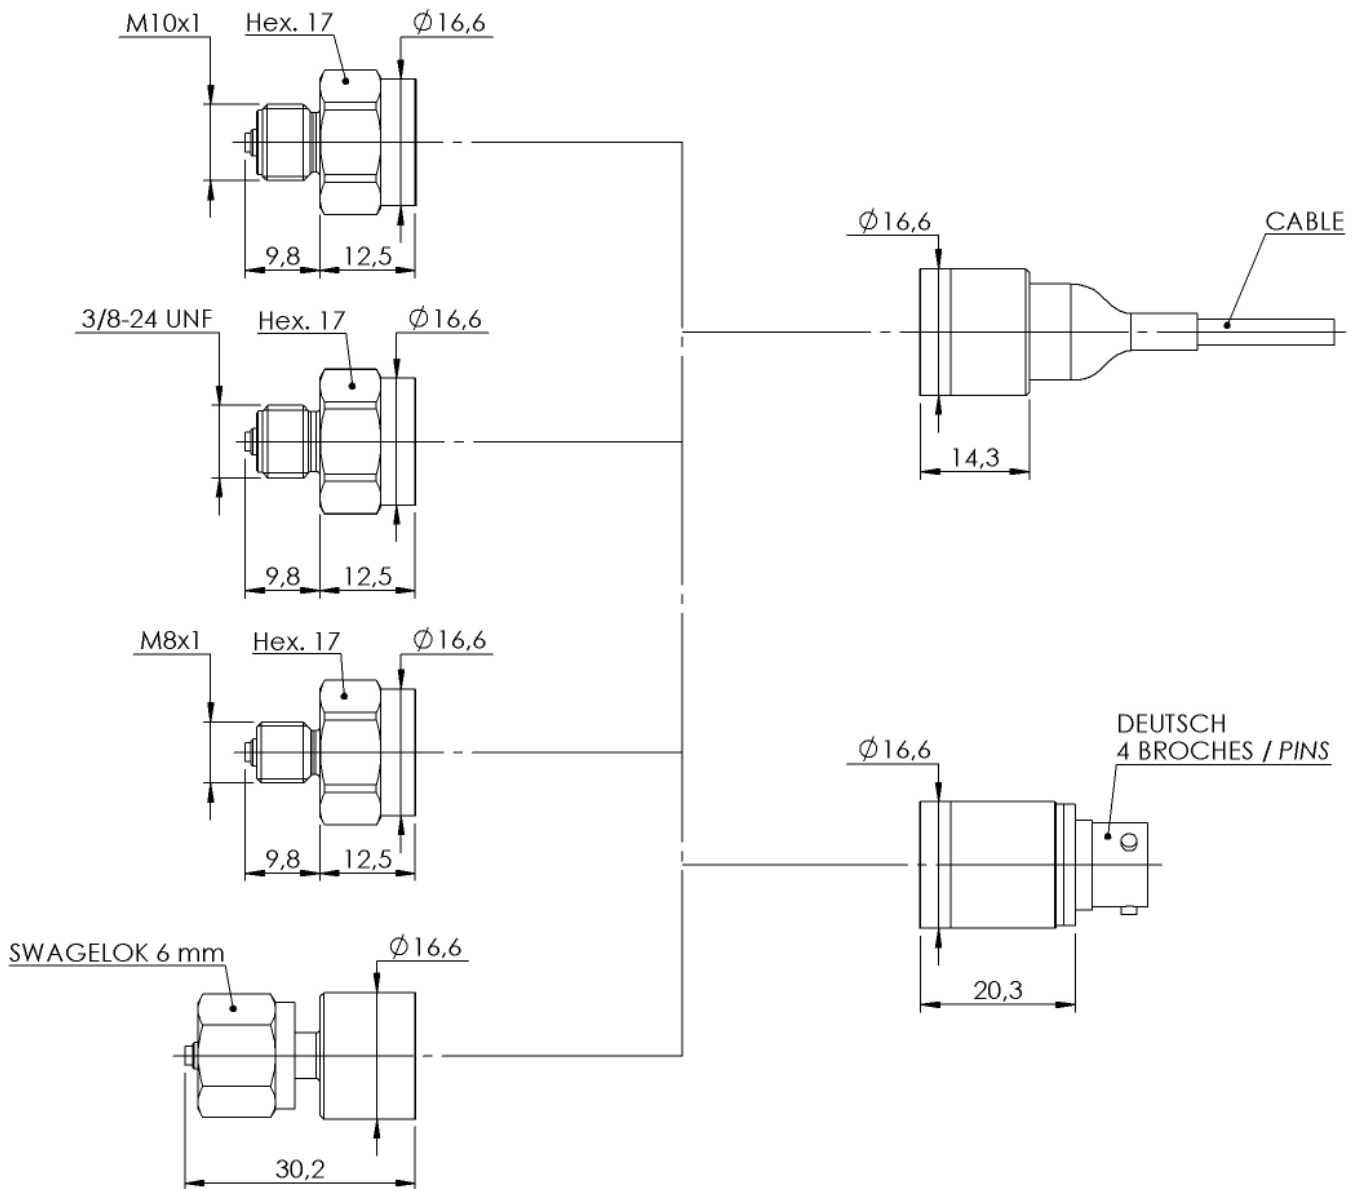
Pressure ranges (FS)	-1/+4bar ; -1/+9bar ; 5bar ; 10bar ; 20bar ; 40bar ; 100bar ; 250bar ; 400bar ; -14.5/+60PSI ; -14.5/+140PSI ; 30PSI ; 70PSI ; 150PSI ; 300PSI ; 500PSI ; 1500PSI ; 3000PSI ; 5000PSI
Type	Absolute ; Gage
Type (for ranges > 40 bar)	Sealed Gage
Safe overload	150% FS
Burst pressure	300% FS
Output impedance	> 3000 Ohms typ.
Input impedance	> 3500 Ohms typ.
Power supply	5 to 15Vdc
Consumption	< 10mA
Insulation	> 1000 MOhms under 50Vdc at ambient temperature
Output at -100%FS (only for ± range)	Proportional to +100%FS
Output at 0%FS	0mV/V

## Technical Specifications


Output at 100%FS	1.5mV/V nom.
Zero and sensitivity settings tolerances	±3% FS
Non linearity and hysteresis combined	±0.25% FS
Non repeatability	±0.02% FS typ.
Compensated temperature range	-30 to +150°C Option : 0 to +175°C
Operating temperature range	-40 to +150°C (-40 to +175°C if optional compensation up to 175°C)
Combined thermal zero & sensitivity shifts	±0.02% FS/°C Option : ±0.01% FS/°C
Constant acceleration in linear vibrations	± 0.02% FS/g (frequency 20-2000Hz, 50g max.)
Mechanical shock	100g ½ sinus 1ms
Electrical protection	Protected against polarity inversion
EMC protection	Compliant to EN61000
Electrical connection up to 150°C	AWG26, Viton Jacketed Shielded Cable Ø3mm, 4 wires Option : DEUTSCH Autosport AS4H06-05-PN-HE connector
Electrical connection above 150°C	AWG26 Shielded Teflon Cable Ø3.4mm ±0.2, 5 wires Option : DEUTSCH Autosport AS4H06-05-PN-HE connector
Mechanical connection	3/8-24 UNF-3A male ; M10x1-4h male Option : M8x1-6g male ; Swagelok nut SS-6M2-1 for OD 6mm pipe
Material(s) of wetted parts	Stainless Steel 316L ; Stainless Steel 17-4PH ; Stainless steel 15-5PH
Weight	< 20g without cable

## Codification

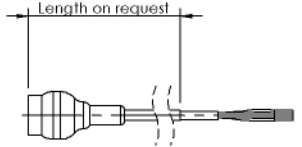

High Temperature Miniature Pressure Sensor	PHT16	1	S	10bar	A	02	05	F	1	1	
Output Signal											
	mV/V		1								
Material											
	Stainless Steels		S								
Range											
	Example			10bar							
Type											
	Absolute				A						
	Gage				G						
	Sealed Gage				SG						
Mechanical connection											
	M10x1-4h male					02					
	M8x1-6g male					03					
	3/8-24 UNF-3A male					11					
	Swagelok nut SS-6M2-1 for OD 6mm pipe					15					
Electrical connection											
	DEUTSCH Autosport AS4H06-05-PN-HE connector						05				
	AWG26, Viton Jacketed Shielded Cable Ø3mm, 4 wires							08/1m			
	AWG26 Shielded Teflon Cable Ø3.4mm ±0.2, 5 wires							09/1m			
Compensated temperature range											
	-30 to +150°C								F		
	0 to +175°C								G		
Non linearity and hysteresis combined											
	±0.25% FS									1	
Combined thermal zero & sensitivity shifts											
	±0.02% FS/°C										1
	±0.01% FS/°C										2



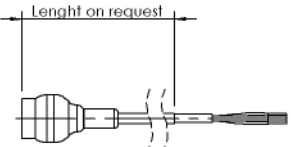

DIMENSIONS : mm



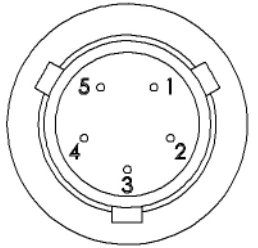
5 CONDUCTOR TEFLON CABLE	
mV/V OUTPUT	CONDUCTOR
+ EXCITATION	RED
+ SIGNAL	GREEN
- SIGNAL	WHITE
- EXCITATION	BLACK
NC	BLUE
SENSOR HOUSING	SHIELD

#26 AWG, 4 CONDUCTOR SHIELDED VITON CABLE	
mV/V OUTPUT	CONDUCTOR
+ EXCITATION	RED
+ SIGNAL	GREEN / YELLOW
- SIGNAL	WHITE
- EXCITATION	BLUE / BLACK
SENSOR HOUSING	SHIELD

DEUTSCH ASH06-05PN-HE - 5 PINS	
mV/V OUTPUT	PIN
+ EXCITATION	PIN 1
+ SIGNAL	PIN 3
- SIGNAL	PIN 4
- EXCITATION	PIN 2
SENSOR HOUSING	PIN 5



Agent :



E.F.E.  
 L'ESSOR FRANCAIS ELECTRONIQUE  
 16 Rue Porte a Bateaux - 27540 Ivry-la-Bataille - FRANCE  
 Tel : 33 (0)2 32 22 35 05 - Fax : 33 (0)2 32 36 93 08  
[www.efe-sensor.com](http://www.efe-sensor.com) - [infos@efe-sensor.com](mailto:infos@efe-sensor.com)